

# MTL4511 – MTL5511

## SWITCH/ PROXIMITY DETECTOR INTERFACE

### 1-channel, with line fault detection

The MTLx511 enables a safe-area load to be controlled by a switch or proximity detector located in a hazardous-area. When selected, open or short circuit conditions in the field wiring are detected by the line-fault-detect (LFD) facility and also indicated on the top of the module. Phase reversal for the channel is selected by a switch on the side of the module and output is provided by changeover relay contacts.

## SPECIFICATION

See also common specification

### Number of channels

One

### Location of switches

Zone 0, IIC, T6 hazardous area

Div. 1, Group A hazardous location

### Location of proximity detector

Zone 0, IIC, T4–6 hazardous area if suitably certified

Div. 1, Group A hazardous location

### Hazardous-area inputs

Inputs conforming to BS EN60947–5–6:2001 standards for proximity detectors (NAMUR)

### Voltage applied to sensor

7 to 9V dc from  $1k\Omega \pm 10\%$

### Input/output characteristics

Normal phase

Outputs closed if input  $> 2.1mA$  ( $< 2k\Omega$  in input circuit)

Outputs open if input  $< 1.2mA$  ( $> 10k\Omega$  in input circuit)

Hysteresis:  $200\mu A$  ( $650\Omega$ ) nominal

### Line fault detection (LFD) (when selected)

User-selectable via switches on the side of the unit. A line fault is indicated by an LED. The channel output relay is de-energised if an input line fault is detected.

Open-circuit alarm on if  $I_{in} < 50\mu A$

Open-circuit alarm off if  $I_{in} > 250\mu A$

Short-circuit alarm on if  $R_{in} < 100\Omega$

Short-circuit alarm off if  $R_{in} > 360\Omega$

Note: Resistors must be fitted when using the LFD facility with a contact input  $500\Omega$  to  $1k\Omega$  in series with switch

$20k\Omega$  to  $25k\Omega$  in parallel with switch

### Safe-area output


Single pole relay with changeover contacts

Note: reactive loads must be adequately suppressed


### Relay characteristics

	MTL4511	MTL5511
<b>Response time:</b>	10ms maximum	10ms maximum
<b>Contact rating:</b>	10W, 0.5A, 35V dc	250V ac, 2A, $\cos\phi > 0.7$ , 40V dc, 2A, resistive load

## MTL4511

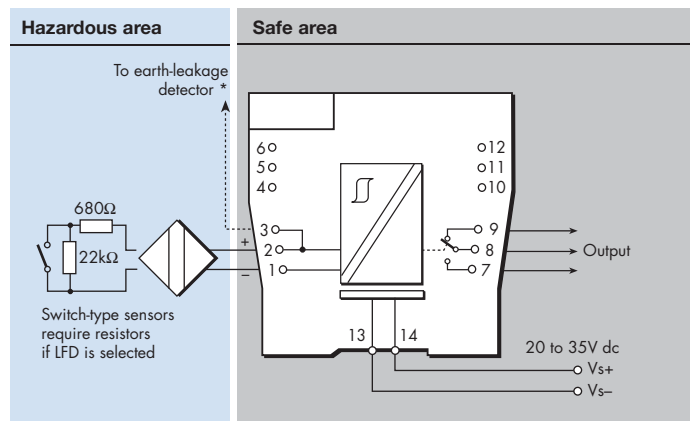

## MTL5511

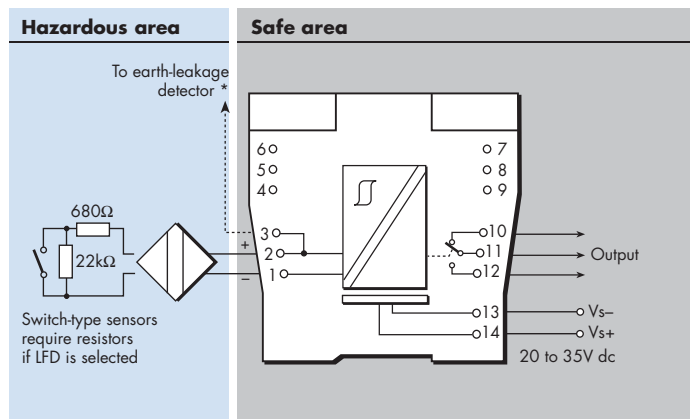

\*Signal plug HAZ1-3 is required for access to this function

### LED indicators

Green: power indication

Yellow: channel status, on when output energised

Red: LFD indication, on when line fault detected

### Maximum current consumption

25mA at 24V

### Power dissipation within unit

0.6W at 24V

### Safety description (each channel)

$V_o=10.5V$   $I_o=14mA$   $P_o=37mW$   $U_m=253V$  rms or dc

### SIL capable

These models have been assessed for use in IEC 61508 functional safety applications. See data on MTL web site.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA): +44 (0)1582 723633  
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075  
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 487 7887  
sales@mtlsing.com.sg

EPsX511 Rev2 080210