

# MTL4517 – MTL5517 SWITCH/ PROXIMITY DETECTOR INTERFACE

2-channel, line fault detection, phase reversal

The MTLx517 enables two safe-area loads to be controlled, through a relay, by proximity detectors or switches located in a hazardous area. Line faults are signalled through a separate relay and indicated on the top of the module. Switches are provided to select phase reversal and to enable the line fault detection.

## SPECIFICATION

See also common specification

### Number of channels

Two

### Location of switch

Zone 0, IIC, T6 hazardous area  
Div.1, Group A, hazardous location

### Location of proximity detector

Zone 0, IIC, T4–6 hazardous area, if suitably certified  
Div.1, Group A, hazardous location

### Hazardous-area inputs

Inputs conforming to BS EN60947–5–6:2001 standards for proximity detectors (NAMUR)

### Voltage applied to sensor

7 to 9V dc from  $1k\Omega \pm 10\%$

### Input/output characteristics

Normal phase

Outputs closed if input  $> 2.1mA$  ( $< 2k\Omega$  in input circuit)

Outputs open if input  $< 1.2mA$  ( $> 10k\Omega$  in input circuit)

Hysteresis:  $200\mu A$  ( $650\Omega$ ) nominal

### Line fault detection (LFD) (when selected)

User selectable by switches on the side of the module.

Line faults are indicated by the LED for each channel.

Line fault relay is energised and channel output relay de-energised if input line-fault detected

Open-circuit alarm on if  $I_{in} < 50\mu A$

Open-circuit alarm off if  $I_{in} > 250\mu A$

Short-circuit alarm on if  $R_{in} < 100\Omega$

Short-circuit alarm off if  $R_{in} > 360\Omega$

Note: Resistors must be fitted when using the LFD facility with a contact input  
 $500\Omega$  to  $1k\Omega$  in series with switch  
 $20k\Omega$  to  $25k\Omega$  in parallel with switch

### Safe-area output

Channel: Two single-pole relays with normally open contacts


LFD: Single pole relay with changeover contacts

Note: reactive loads must be adequately suppressed


### Relay characteristics

	MTL4517	MTL5517
Response time:	10ms maximum	10ms maximum
Contact rating:	10W, 0.5A, 35V dc	250V ac, 2A, $\cos\phi > 0.7$ , 40V dc, 2A, resistive load

## MTL4517

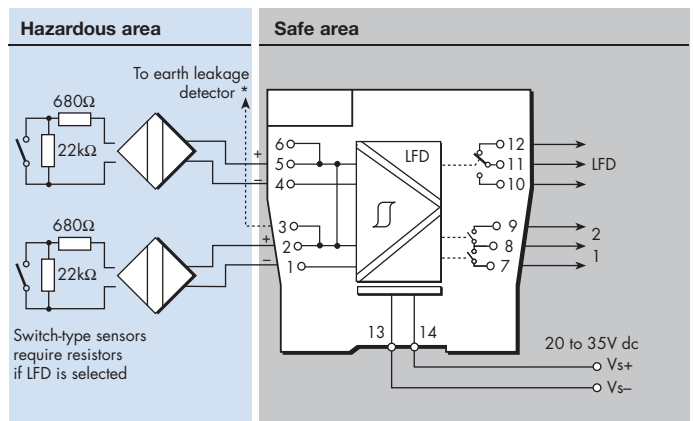

## MTL5517

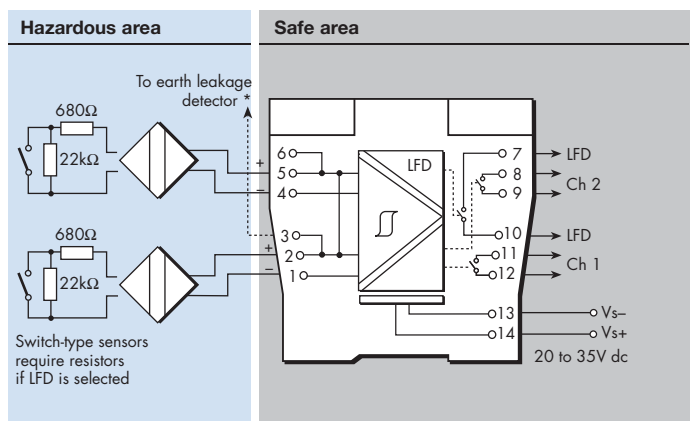

\* Signal plug HAZ1-3 is required for access to this function

### LED indicators

Green: power indication

Yellow: two: channel status, on when output energised

Red: two: LFD indication, on when line fault detected

### Maximum current consumption

35mA at 24V

### Power dissipation within unit

0.84W at 24V

### Safety description (each channel)

$U_o=10.5V$   $I_o=14mA$   $P_o=37mW$   $U_m = 253V$  rms or dc

### SIL capable

These models have been assessed for use in IEC 61508 functional safety applications. See data on MTL web site.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA): +44 (0)1582 723633  
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075  
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 487 7887  
sales@mtlsing.com.sg

EPSx517 Rev2 080210