


MTL5018ac SWITCH/ PROXIMITY DETECTOR INTERFACE

two-channel, with line fault detection
and phase reversal



The MTL5018ac enables two safe-area loads to be controlled by two switches or proximity detectors located in a hazardous area. Two relay outputs are provided. Independent phase reversal control allows an alarm condition to be signalled for either state of the sensor. A selectable line fault detect (LFD) facility detects an open or short circuit in either field circuit.

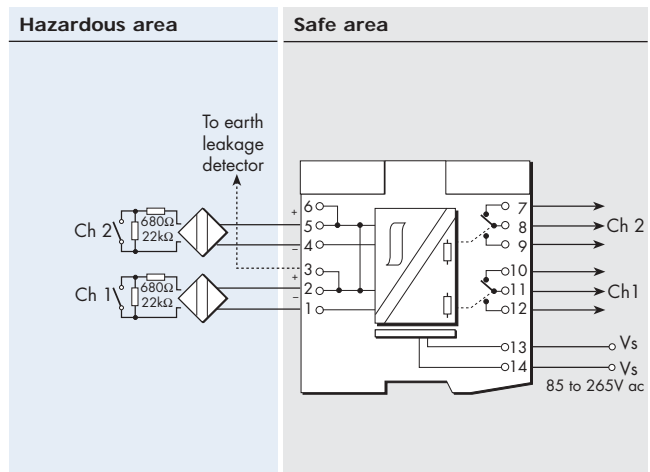

SPECIFICATION

See also common specification

Number of channels

Two

Location of switches

Zone 0, IIC, T6 hazardous area
Div. 1, Group A hazardous location

Location of proximity detector

Zone 0, IIC, T4-6 hazardous area if suitably certified
Div. 1, Group A hazardous location

Safe-area output

Two relays with changeover contacts

Hazardous-area inputs

Inputs conforming to NAMUR/DIN 19234 standards for proximity detectors

Voltage applied to sensor

7 to 9V from $1k\Omega \pm 10\%$

Input/output characteristics

Normal (reverse) phase:

output energised (de-energised) if $I_{in} > 2.1mA$ or $R_{in} < 2k\Omega$

output de-energised (energised) if $I_{in} < 1.2mA$ or $R_{in} > 10k\Omega$

Hysteresis: 200 μA , typical

Line fault detection (LFD)

User-selectable via switches on the top of the unit. Line faults are indicated by an LED for each channel. A detected line fault de-energises the relay.

Open-circuit alarm on if $I_{in} < 100\mu A$

Open-circuit alarm off if $I_{in} > 250\mu A$

Short-circuit alarm on if $R_{in} < 100\Omega$

Short-circuit alarm off if $R_{in} > 360\Omega$

Note: Resistors must be fitted when using the LFD facility with a contact input

500 Ω to 1k Ω in series with switch

20k Ω to 25k Ω in parallel with switch

Phase reversal

Independent for each channel, user-selectable

Relay type

Single pole, changeover contacts

Note: reactive loads must be adequately suppressed

Relay characteristics

Response time: 10ms maximum

Contact rating: 250V ac, 2A, $\cos\phi > 0.7$

40V dc, 2A, resistive load

LED indicators

Green: power indication

Yellow: two: status of each channel (on when outputs are energised)

Red: two: LFD indication for each channel (on when line fault detected)

Maximum power dissipation

<2.5W

Isolation

250V ac or dc between power supply, hazardous-area circuits and relay outputs

Terminal	Function
1	Input -ve (Ch 1)
2	Input +ve (Ch 1)
3	Earth leakage detection
4	Input -ve (Ch 2)
5	Input +ve (Ch 2)
6	Earth leakage detection
7	Normally-closed contact (Ch 2)
8	Common (Ch 2)
9	Normally-open contact (Ch 2)
10	Normally-closed contact (Ch 1)
11	Common (Ch 1)
12	Normally-open contact (Ch 1)
13	AC Supply
14	AC Supply

Safety description (each channel)

10.5V, 800 Ω , 14mA, $U_m = 250V$ rms or dc

Power Supply

85 to 265V ac

45 to 65 Hz



EUROPE (EMEA)
AMERICAS
ASIA PACIFIC
E-mail: enquiry@mtl-inst.com

Tel: +44 (0)1582 723633
Tel: +1 603 926 0090
Tel: +65 487 7887
Web site: www.mtl-inst.com

Fax: +44 (0)1582 422283
Fax: +1 603 926 1899
Fax: +65 487 7997