

MTL3045 ISOLATING DRIVER, 4/20mA

for I/P converters

The MTL3045 isolates and passes on a 4/20mA or 0/20mA signal from a controller to drive a current-to-pressure (I/P) converter, a position actuator, or any other load up to 800Ω in the hazardous area. Its high output capability of 16V at 20mA combined with the low (4V) drop across its input terminals, and its excellent accuracy, make it the first choice for these applications.

SPECIFICATION

See also 'Common specification'

Number of channels

One, fully floating

Location of I/P converter

Zone 0, IIC, T4-6 hazardous area if suitably certified
Div 1, Group A, hazardous location

Input resistance

≤200Ω (4V at 20mA)

Input and output signal range

0 to 20mA

Maximum load resistance

800Ω (16V at 20mA)

Output resistance

>2MΩ

Input and output circuit ripple

<40μA peak-to-peak

Transfer accuracy at 20°C

Better than 20μA

Temperature drift

<1μA/°C

Response time

Settles to within 10% of final value after typically 55ms

Power requirement

65mA typical at 24V

90mA maximum at 20 to 35V

Power dissipation within unit

1.5W typical at 24V with 20mA signal

2.3W maximum at 35V with 20mA signal

Replaceable fuse

125mA, 5x20mm glass to DIN 41571 sht.2, semi-time-lag (M)

Safety description


28V, 300Ω, 93mA, $U_m = 250V$ rms or dc

FM max entity parameters

$V_{OC} = 28V$, $I_{SC} = 93mA$, $C_a = 0.13\mu F$, $L_a = 4.0mH$

Weight

150g

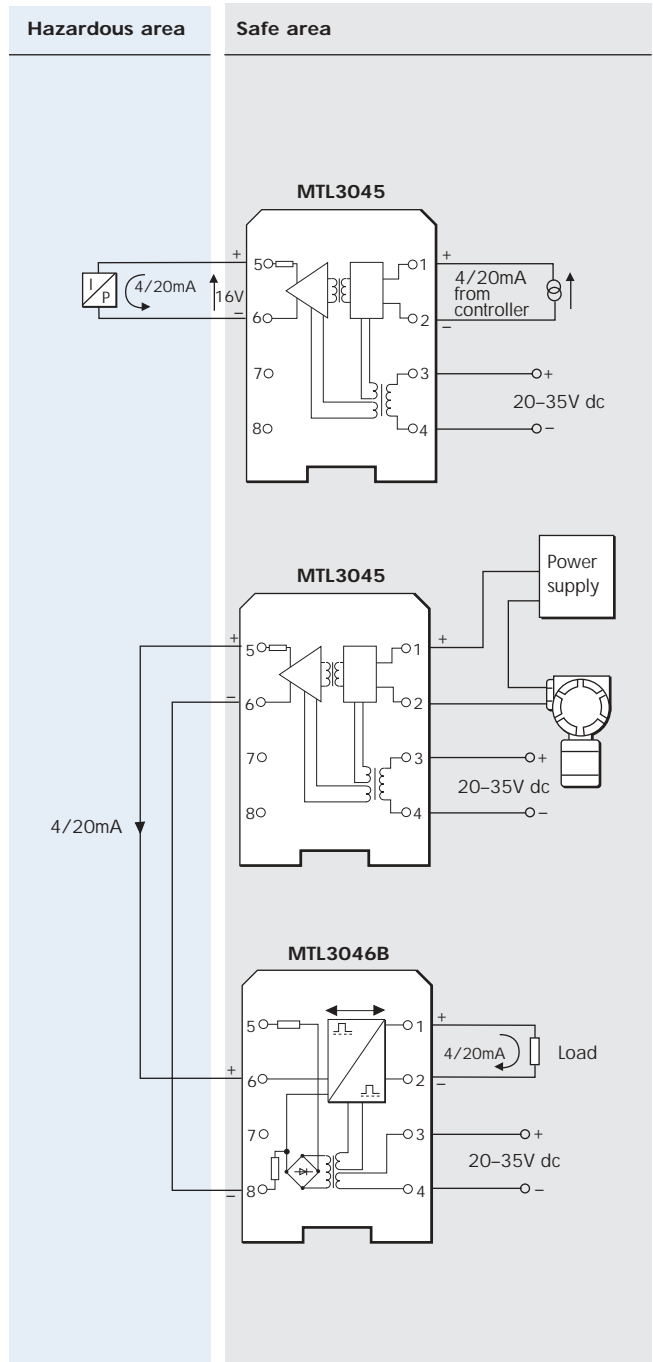

OTHER APPLICATIONS

The MTL3045 can be used, in conjunction with the MTL3046B, to transfer measurement or control signals through a hazardous area separating two safe areas.



EUROPE (EMEA)
AMERICAS
ASIA PACIFIC
E-mail: enquiry@mtl-inst.com

Tel: +44 (0)1582 723633
Tel: +1 603 926 0090
Tel: +65 487 7887

Fax: +44 (0)1582 422283
Fax: +1 603 926 1899
Fax: +65 487 7997

Web site: www.mtl-inst.com

June 2004