



9370-FB Series

Fieldbus Barrier Enclosures, 6 or 12 spur

- For FOUNDATION™ fieldbus networks in hazardous areas
- Complete enclosure systems for 6 or 12 intrinsically safe spur connections
- Mount in Zone 1 (gas) or 21 (dust) with spurs connected into Zone 0
- Compatible with FISCO and Entity-certified fieldbus instruments
- Compact, modular construction
- Ergonomic mechanical design
- Pluggable system components, without 'gas free' constraints
- Optional, integrated surge protection for trunk and spurs



(Surge protection and cable glands shown are not included as standard)

The 9370-FB Series Fieldbus Barriers are field-mounted wiring hubs that create up to twelve intrinsically safe spur connections from a high-energy trunk, for connection to suitably certified FOUNDATION™ fieldbus H1 instruments. Capable of supporting heavily loaded fieldbus segments and long trunk cable lengths, 9370-FB Series Barriers may be installed in Zone 1 (gas) or Zone 21 (dust) hazardous areas, with the trunk wiring implemented using suitably protected cable and increased safety (Ex e) connection facilities.

Each intrinsically safe spur is capable of supporting a FISCO or 'Entity' certified fieldbus device located in a Zone 0 or 1 hazardous area. The short-circuit protected spurs are galvanically isolated from the trunk and require no protective ground connection in the field.

Unlike conventional Fieldbus Barrier products that are based on stand-alone modules, the 9370-FB Series units are supplied as complete, factory-assembled enclosure systems in a choice of stainless steel or glass reinforced plastic (GRP) materials that do not require additional wiring, customised housings or complex ancillary components. Electrical and mechanical aspects of the design are integrated, providing the industry's first complete, ergonomic solution for 'High Energy Trunk' applications in hazardous areas combined with an enclosure 'footprint' up to 40% smaller than existing implementations.

Uniquely, the key modular components of the system (Fieldbus Barrier, Terminator and Surge Protectors) may be 'hot-plugged' by design and without gas-clearance procedures or separate isolating switches. This virtually eliminates the risk associated with hazardous area maintenance activities, speeds module replacement and avoids the need for specialist operator training.

Optional features include pluggable surge protection components for the fieldbus trunk and individual spurs. Connection facilities with generous room for cable management are provided within the Fieldbus Barrier enclosure for the trunk and spur wiring. Where appropriate, the trunk wiring may be extended from one Fieldbus Barrier enclosure to another.

For added flexibility, a 12-way enclosure can be specified part-populated with 6-spurs (model no. 9374-FB). This permits future expansion from six to twelve spurs simply by plugging in an additional Fieldbus Barrier module.

The 9370-FB Series Fieldbus Barrier is bus-powered and requires no additional power supply in the field. When used with a fieldbus host control system, power for the trunk may be provided by MTL-Relcom power supplies in redundant or non-redundant format.

SPECIFICATION

SPURS

	9371-FB	9373-FB	9374-FB* (expandable)
# of spurs	6	12	6 (+6)
# of 9377-FB modules installed	1	2	1 (+1)
Current per spur	0 - 40mA	0 - 40mA	0 - 40mA
Total current all spurs (max.)	240mA	480mA	240 (+240)mA
Shorted spur current (max.)		45mA	
Spur voltage		≥ 10V @ 40mA	
No-load voltage		12V min.	

Number of field devices

1 per spur

Maximum spur length

120m (depending on the number of spurs per fieldbus segment)

Galvanic isolation (to EN 60079-11)

Trunk to spurs: 1.5kV (test voltage)

Spur to spur: no isolation

Spur surge protection

Plug-in module (part number FS32) - see separate specification

* See ordering information

TRUNK

Data rate

31.25kbaud

Data transmission between trunk and spurs

passive, no repeater function

Number of trunk connections

2 (in & out), internally connected

Input voltage (trunk)

16-32V DC

Low voltage monitoring

Input voltage < 16V, spurs de-energized

Typical DC current for 6 spur (9371-FB) and 12 spur (9373-FB) units (mA)

	@ 16V		@ 24V		@ 32V	
	9371	9373	9371	9373	9371	9373
No load - 0mA each spur	68	136	49	98	41	82
20mA each spur	200	400	137	274	108	216
5 spurs @ 20mA, 1 in s/c	185	-	128	-	101	-
11 spurs @ 20mA, 1 in s/c	-	385	-	265	-	209
40mA each spur	332	664	220	440	168	336

	9371-FB	9373-FB	9374-FB
Power dissipation (max.)	2.85W	5.65W	2.85 (+2.85)W

Fieldbus terminator

Plug-in module (part number 9378-FT) supplied with each 937x-FB enclosure.

Provides 100Ω + 1μF according to IEC 61158-2 - see separate specification

Trunk surge protection

Plug-in module (part number 9376-SP) - see separate specification

Reverse polarity protection

Yes

ELECTRICAL CONNECTIONS

Trunk wiring terminals

Type: Ex e

Cable types and capacity	Screw cage clamp - mm ²	Spring cage clamp - mm ²
Rigid cable	0.5 to 4.0	0.5 to 4.0
Flexible cable	0.5 to 2.5	0.5 to 2.5

Spur field wiring terminals

Type: 3-way, pluggable

Cable types and capacity	Screw cage clamp - mm ²	Spring cage clamp - mm ²
Rigid cable	0.2 to 2.5	0.2 to 2.5
Flexible cable	0.25 to 2.5	0.25 to 2.5

Grounding of cable screens (trunk & spurs)

(Configured with wire connections in the Trunk Terminal Assembly)

Options	Trunk	Spurs
1 Single point grounding	Grounded at host	Trunk & spur screens joined
2 Local grounding of spurs	Grounded at host	Grounded at field enclosure

Equipotential earth/ground connection facility

M8 earth/grounding stud on side wall of enclosure

BARRIER LED INDICATORS

Trunk Power (PWR)

	ON	OFF
Green	Supply voltage > 16V, internal supply healthy	Supply voltage < 16V or no supply

Spurs (tri-colour, per spur)

Colour	Steady	Flashing
Green	Channel powering spur - spur OK	Channel powering spur - spur open
Red	Internal fault	Internal fault
Yellow	Short to shield	Short circuit, current limit
Off	Supply < 16V or no supply	N.A.

PHYSICAL NETWORKS

IEC61158-2 FOUNDATION™ fieldbus H1

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA): +44 (0)1582 723633
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 487 7887
sales@mtlsing.com.sg

EPS 9370-FB Rev4 100211

HAZARDOUS AREA APPROVALS

Location of equipment

Safe area or Zone 1 IIC T4 or Zone 21 hazardous area

Location of connected spur equipment

Safe area or Zone 0 IIC hazardous area

Certification codes

Ex II 2(1) GD

Ex d e ib mb [ia Ga] IIC T4 Gb

Ex tb IIIC T80°C Db

Certificate numbers

Baseefa 09 ATEX0185X

IECEx BAS09.0082X *

Safety description (spurs)

$U_o = 17.5V$

$I_o = 248mA$

$P_o = 982mW$

$C_i = 0$

$L_i = 0$

Spurs in accordance with FISCO standard IEC 60079-27

* IECEx certification is pending on the GRP models. Please contact MTL for latest status information

ENVIRONMENTAL

Ambient temperature

PP-System	SS-System	Storage (PP or SS)
-40°C ... +65°C	-40°C ... +70°C	-40°C ... +75°C

Relative humidity

< 95%, non-condensing

Electromagnetic compatibility

EN 61326 – 1:2006

NAMUR NE 21

Shock & Vibration

Vibration:

BS EN 60068-2-6: 2008 Test Fc: 1g

BS EN 60068-2-64: 1995 Test Fh: 1g

Shock:

BS EN 60068-2-27: 1993 Test Ea: 15g

MECHANICAL

Materials

937x-FB-xx-SS	937x-FB-xx-PP
316L Stainless Steel	Black, Glass Reinforced Plastic (GRP)

Mounting position (recommended)

On vertical plane, with glands and breather on underside

Cable/Breather entries

Trunk: 2 x M20

Spurs: 6 or 12 (depending on model) x M20

Breather 1 x M20

Enclosures are pre-fitted with an Ex e nickel-plated breather and Ex e nickel-plated brass plugs in all cable gland holes. The gland plugs must only be replaced with Ex e equipment certified cable glands that are also capable of maintaining an ingress protection level of \geq IP65. See ordering information for gland options.

Protection

Enclosures (937x-FB-xx-XX) IP65

Intrinsically safe terminals IP20

Ex e terminals IP30

Enclosure sizes - see dimension drawings for details

GRP, 6 spurs 271 x 271x 136mm

GRP, 12 spurs 554 x 271x 136mm

Stainless steel, 6 spurs 291 x 271x 130mm

Stainless steel, 12 spurs 428 x 271x 130mm

Enclosure Weights †

MTL Part number	Weight (kg)
9371-FB-xx-SS	5.79
9373-FB-xx-SS	8.43
9374-FB-xx-SS	7.48
9371-FB-xx-PP	4.49
9373-FB-xx-PP	8.10
9374-FB-xx-PP	7.15

† excludes any cable glands or surge protection items

ORDERING INFORMATION

Order as:

9371-FB-xx-XX	6-spur Fieldbus Barrier enclosure system with one 6-spur 9377-FB module installed.
9373-FB-xx-XX	12-spur Fieldbus Barrier enclosure system with two 6-spur 9377-FB modules installed.
9374-FB-xx-XX	12-spur Fieldbus Barrier enclosure system with one 6-spur 9377-FB module installed. (Expandable to 12-spur by addition of a second 9377-FB module)
Where xx =	PS (pluggable screw terminal connectors) PC (pluggable spring clamp connectors)
Where XX =	SS – 316L Stainless Steel PP – Glass Reinforced Plastic (GRP) - Black
	<i>(Note: All enclosures are pre-wired and include a 9378-FT Fieldbus terminator module)</i>
9377-FB	Fieldbus Barrier 6-spur, pluggable module
9378-FT	Fieldbus terminator
9376-SP	Trunk surge protection module
FS32	Spur surge protection module

CABLE GLANDS

The following M20 cable glands are Ex e equipment certified, better than IP65 rated and suitable for use with the 9370-FB Series Fieldbus Barriers. They can be supplied separately and are available to order individually using the following part numbers.

MTL Order No.	Manufacturer and Type	Description (Qty 1)
FCS-1000-P20	Jacob 50.260 PASWL/Ex	Plastic gland
FCS-1000-C20	Capri 816694	Nickel-plated brass gland
FCS-1000-A20	Capri 846694	Armoured nickel-plated brass gland
FCS-1000-S20	Capri 816699	Stainless steel gland
FCS-1000-R20	Capri 846699	Armoured stainless steel gland

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA): +44 (0)1582 723633
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075
csinfo@mtl-inst.com


ASIA-PACIFIC: +65 6 487 7887
sales@mtlsing.com.sg

EPS 9370-FB Rev4 100211


DIMENSIONS (mm)

Mounting holes: **SS** models:- Ø 10.8mm; **PP** models:- 6.5mm slot, 12mm head max.

9371-FB-xx-SS

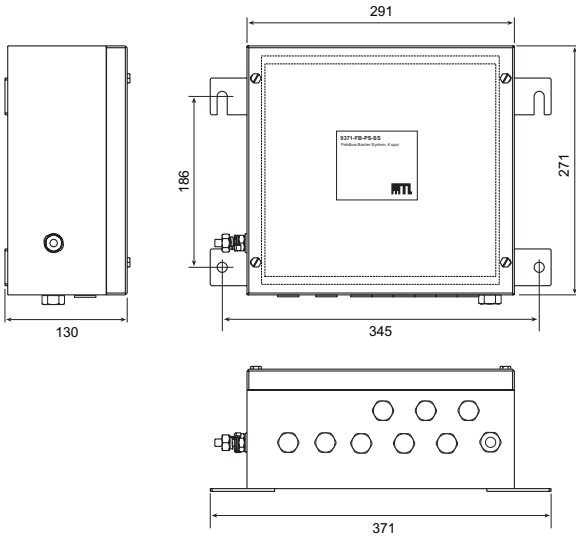


9371-FB-xx-PP

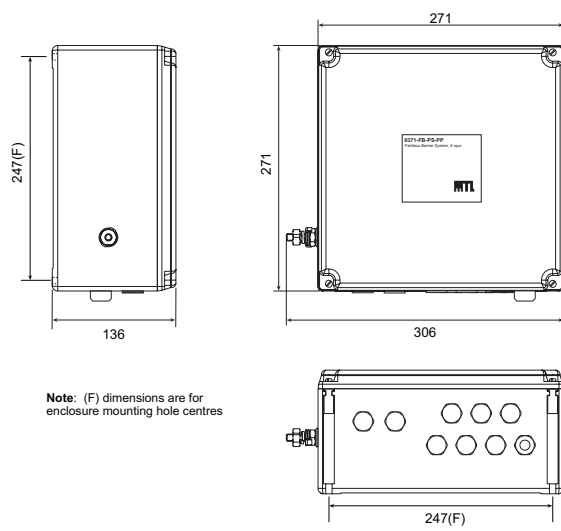


9373-FB-xx-SS

9374-FB-xx-SS

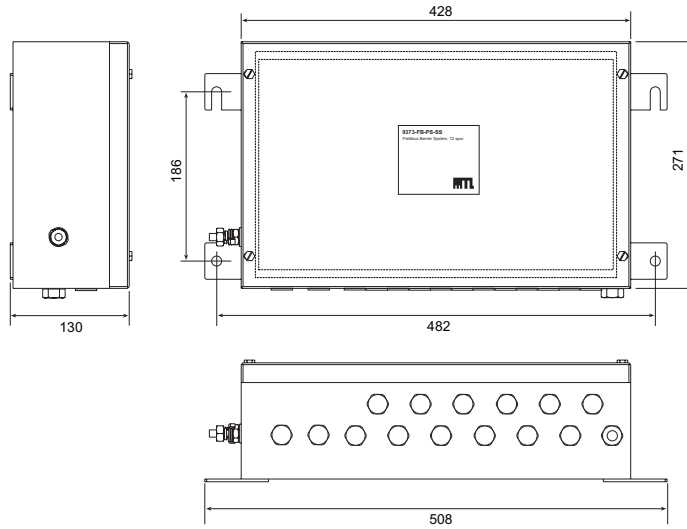

9373-FB-xx-PP

9374-FB-xx-PP

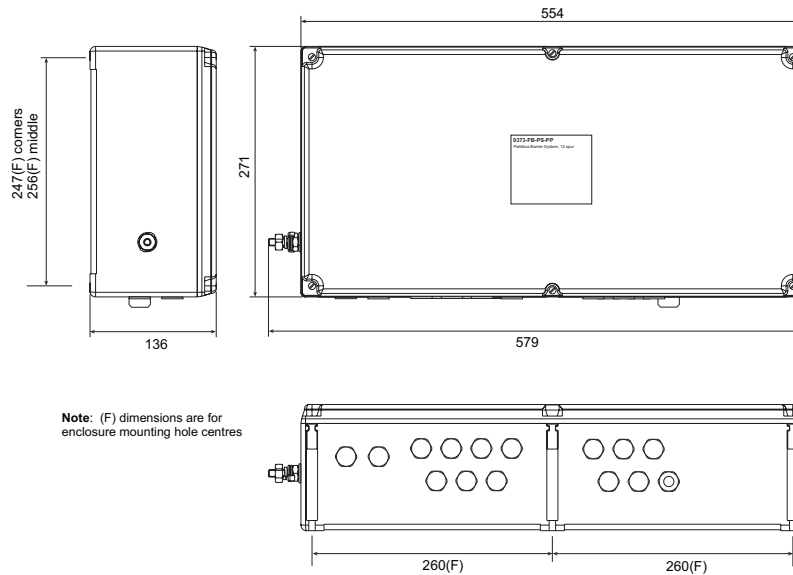

EUROPE (EMEA): +44 (0)1582 723633
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 487 7887
sales@mtlsing.com.sg

EPS 9370-FB Rev4 100211