

## F880

### Redundant fieldbus power for Yokogawa CENTUM 3000 R3 control system

- For For FOUNDATION™ fieldbus networks in hazardous areas
- Integrated redundant fieldbus power for ALF111 FOUNDATION™ fieldbus cards
- 8-segment redundancy
- High-density, compact design
- Fully isolated
- Hot swappable power modules\*
- Low power dissipation
- Zero component carrier
- On-line diagnostics option
- Redundant power & conditioning
- Vertical DIN-rail mounting
- F801 output 21.5V, 350mA
- F802 output 28V, 500mA



The **F880 fieldbus power system** is designed to provide redundant power for eight FOUNDATION™ fieldbus H1 segments when used with Yokogawa ALF111 fieldbus cards. The F880 module carrier has system connectors for direct connection to two redundant pairs of fieldbus cards using Yokogawa AKB336 cables.

**Power for the fieldbus segments** is provided by two power modules - F801s or F802s- operating in a redundant configuration (load sharing). Failure alarms, galvanic isolation, power conditioning and segment termination are incorporated into each F80x module. In simplex applications, a single F80x module may be used. Termination of the fieldbus segments is automatically maintained when single or redundant F80x modules are fitted.

**For extreme reliability**, the module carrier has no components and only provides interconnections between the power modules and external connections. It is supported in a rigid metal frame that protects the circuit board from mechanical damage. Secure DIN-rail mounting is provided by integrated fixings.

**Each F80x module monitors** the output of the eight fieldbus segments and indicates an alarm, by means of a built-in, normally closed relay, if any of the segments is shorted or below the minimum output voltage threshold. Failure of either of the bulk power input supplies is also annunciated. The alarm contacts are volt-free and galvanically isolated from other circuitry. Connections to the alarm relays are made via terminals on the F880-Cx carrier. A separate alarm module is not required for this function. LED indicators also show the status of each F80x module and the eight individual segments. In normal operation, each segment LED is lit,

showing that the segment is powered. If a segment is shorted, this LED is extinguished, and the module Alarm LED is lit.

**A separate physical layer diagnostics module** may be installed on the carrier to automatically collect and distribute additional diagnostic information for each of the eight fieldbus segments. For more information see the F809F-Plus product specification.

**The F80x module provides galvanic isolation** between the 24V DC input power and the fieldbus segments, as required by the IEC61158-2 fieldbus standard and the Fieldbus Foundation™ FF-831 validation test for fieldbus power supplies. There is also galvanic isolation between the fieldbus segments, thereby preventing multiple segment failures due to ground faults on more than one segment. Each segment has its own fieldbus power conditioner and current limitation.

**Redundant 24V DC (nom.) input power** is connected to the F880 carrier using two-part pluggable connectors. Field wiring connections are available with either pluggable screw terminals (F880-xS) or pluggable spring clamp terminals (F880-xC).

**Three variants of carriers** are available in the F880 family. The F880-CA-Px carrier provides terminal numbering and consistent connector polarity. Where two columns of F880-CA-Px are installed in a cabinet the carrier is rotated by 180 degrees for installation in the second column. Alternatively, if there is a requirement for cabinet wiring to be symmetrical, there are lefthand (F880-CL-Px) and righthand (F880-CR-Px) versions.

Foundation™ fieldbus is a trademark of Fieldbus Foundation™, Austin, Texas.

\* Gas clearance certificate needed in Zone 2 hazardous areas

# F880 fieldbus power system

April 2022

## SPECIFICATION

### Location of equipment

Safe area,  
Class I Div 2 Groups ABCD T4 or  
Class I Zone 2 IIC T4

### INPUT

	F801	F802
Input voltage (DC)	19.2 - 30.0V	19.2 - 30.0V
Current consumption (24V input, all outputs fully loaded)	3.5A*	6A*
Total Power dissipation (24V input, all outputs fully loaded)	20W*	24W*

\* Redundant operation

### OUTPUT

	F801	F802
Number of channels	Eight (8)	Eight (8)
Voltage (DC)	21.5V - 24.0V	28.0V - 30.0V
Design current (per segment)	0 to 350mA	0 to 500mA
Current limit	> 370mA	> 520mA
Minimum load	0mA	0mA

### Isolation

Fieldbus to input power: 250V AC rms withstand  
Segment to segment: 200V DC withstand

## ALARMS

### Alarm contact rating

1A maximum @ 30V DC maximum

### Alarm contact status

Normally closed

### Alarm threshold

	F801	F802
Segment output	<19V DC	<24V DC

## ELECTRICAL CONNECTIONS

### System connectors

Host 1A, Host 1B, Host 2A, Host 2B via AKB336 cables to ALF111 modules

### Field, Power & Alarm terminals

Pluggable rising cage-clamp screw terminals (-PS)

Conductor size: 0.14 to 2.5 mm<sup>2</sup>

Pluggable spring-clamp screw terminals (-PC)

Conductor size: 0.2 to 2.5 mm<sup>2</sup>

### Diagnostics and ground terminals

Fixed screw terminal connector 0.14 to 2.5 mm<sup>2</sup>

### Cable screen ground connections (version D.0 or higher)

User-selectable jumper for segment shields: isolated (default) or interconnected and ground connection

### Terminators

A single termination is provided automatically when using either 1 or 2 power modules

## ENVIRONMENTAL

### Ambient temperature

	F801	F802
Operating (full load)	-40°C to +65°C	-40°C to +50°C
Operating (60% load)	-40°C to +65°C	-40°C to +65°C
Storage	-40°C to +85°C	-40°C to +85°C

**Note:** Temperature range applies only when mounted on a vertical DIN rail.

### Ingress protection

IP20 to BS EN60529 (Additional protection by use of enclosure)

## MECHANICAL

### Mounting method

Integrated fixings for 'Top hat' DIN rail, 35mm x 7.5mm to EN50022

### Weights


F801: 1.45kg  
F802: 1.50kg  
F880-C\*-P\*: 0.92kg

## ELECTRICAL

### EMC Compliance

To EN61326:1998 Electrical equipment for measurement, control and laboratory use - EMC requirements.

## F880 - BLOCK DIAGRAM

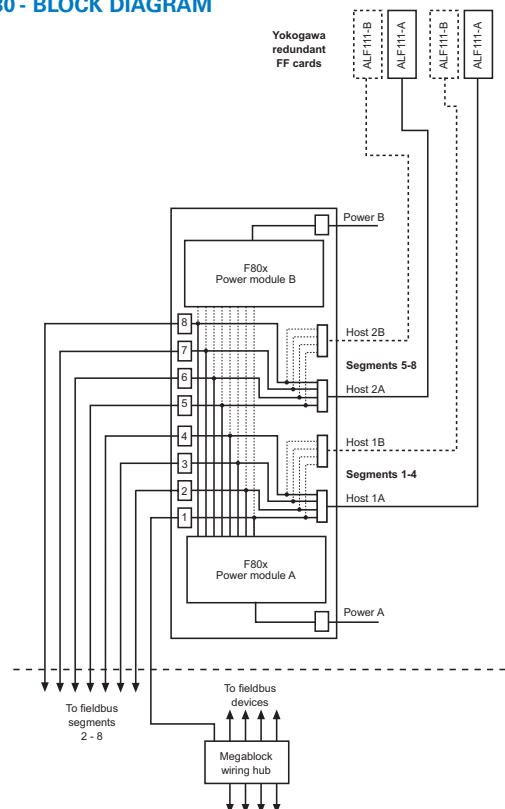

The above diagram shows a block diagram of how the F880 is wired. Note that the Chassis Ground and Alarm connection are not shown. The Diagnostic module is also not shown (see the F809F-Plus product specification). For detailed wiring information see the Installation Instructions for the F880 (Document number 502-089).

## PHYSICAL NETWORKS

IEC61158-2  
ISA-S50.02 Part 2-1992  
FOUNDATION™ fieldbus H1  
Profibus PA

## ORDERING INFORMATION

### DESCRIPTION

Carrier, unpopulated  
Left hand carrier, unpopulated  
Right hand carrier, unpopulated  
8-segment power module: 21.5V, 350mA  
8-segment power module: 28V, 500mA  
Blanking modules included with -NR systems  
Fieldbus diagnostic module

### PART NO.


F880-CA-P\*  
F880-CL-P\*  
F880-CR-P\*  
F801  
F802  
F800-BLK  
F809F-Plus

F880-CA-P* and two F80x modules	with F801 F880-P*	with F802 F880-2-P*
F880-CL-P* and two F80x modules	F880-L*	F880-2-L*
F880-CR-P* and two F80x modules	F880-R*	F880-2-R*
F880-CA-P* and one F80x module	F880-P*-NR	F880-2-P*-NR
F880-CL-P* and one F80x module	F880-L*-NR	F880-2-L*-NR
F880-CR-P* and one F80x module	F880-R*-NR	F880-2-R*-NR


\* = S or C

S = Pluggable Screw Terminal Connectors  
C = Pluggable Spring Clamp Connectors


F801 PARAMETERS

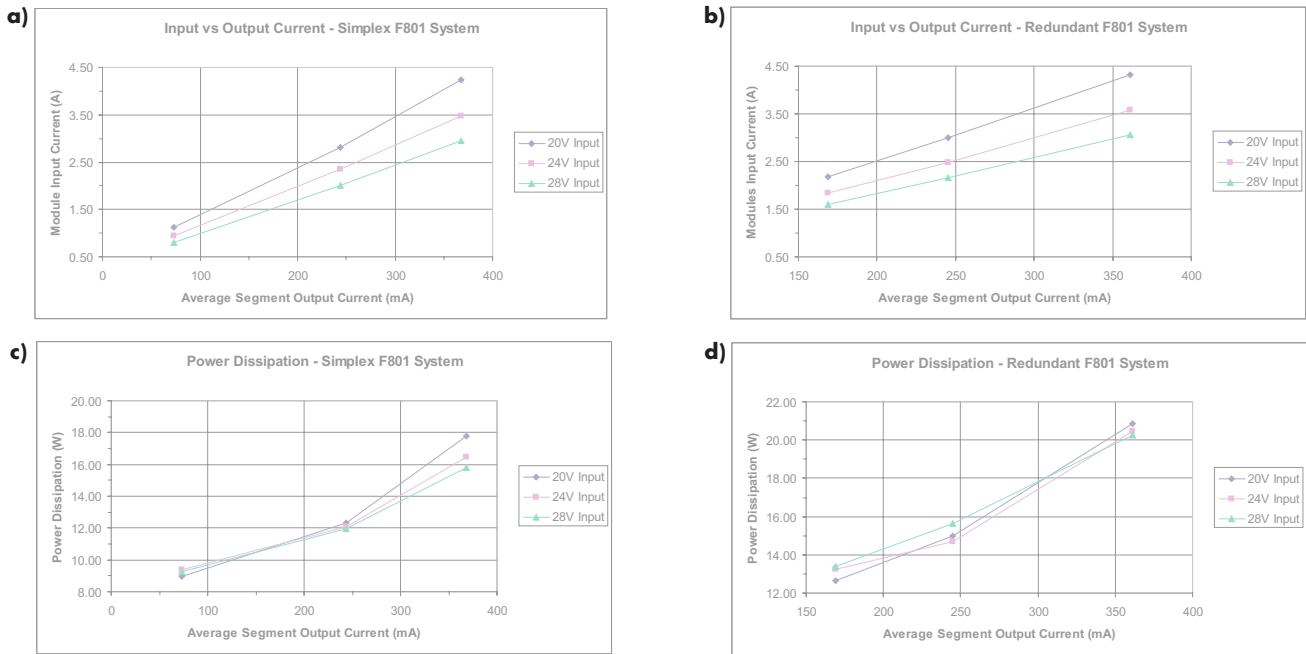


F802 PARAMETERS

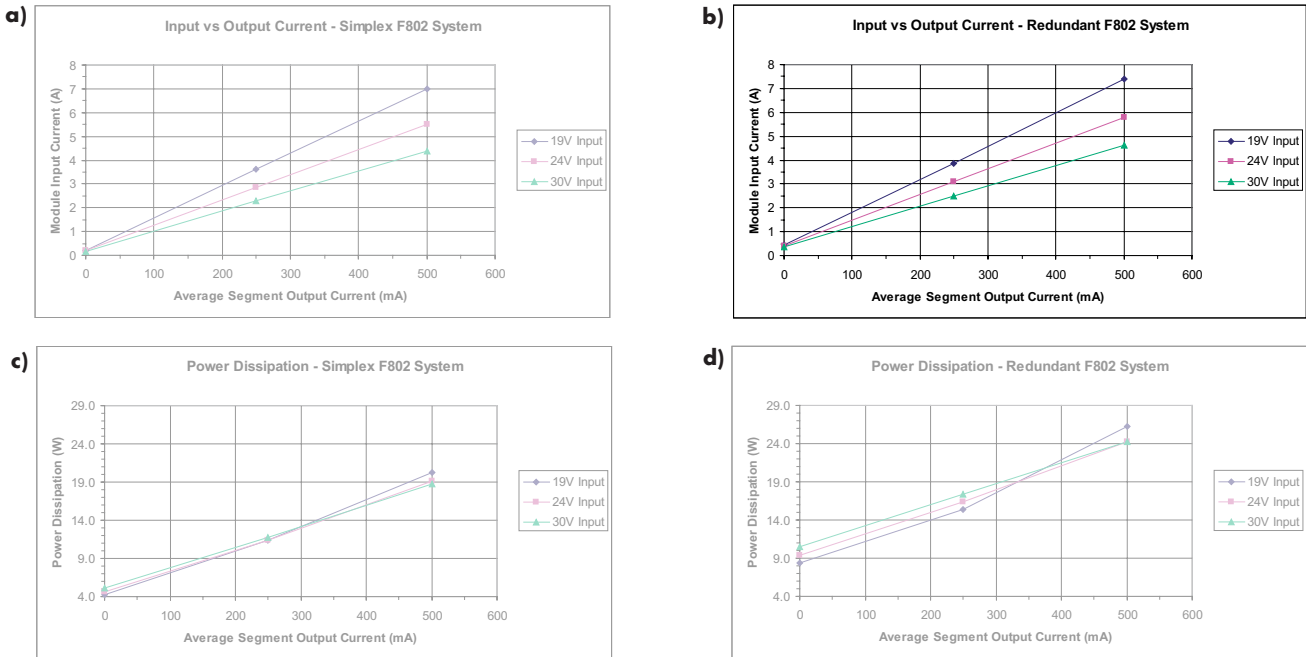





F80x module top panels showing indicators

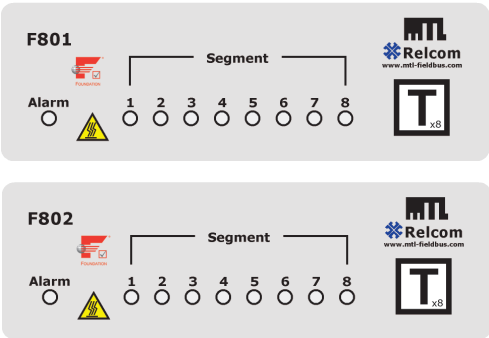

Linking alarm circuits

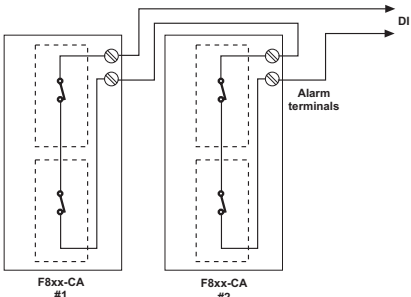

F880-L\* & F880-R\* DIMENSIONS

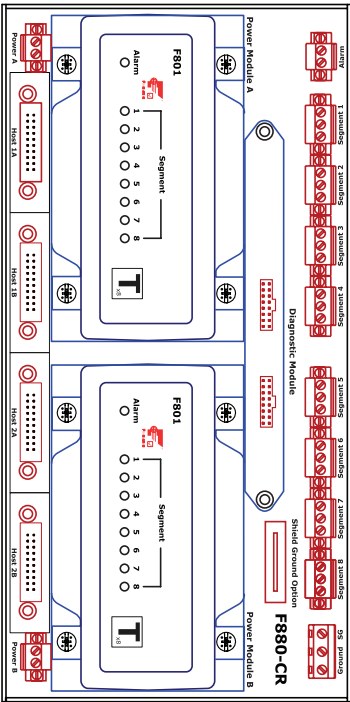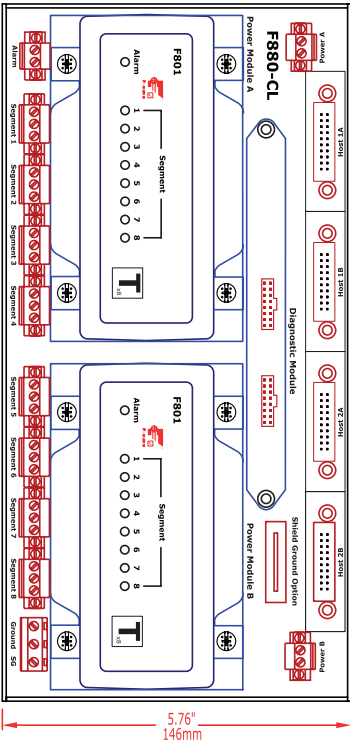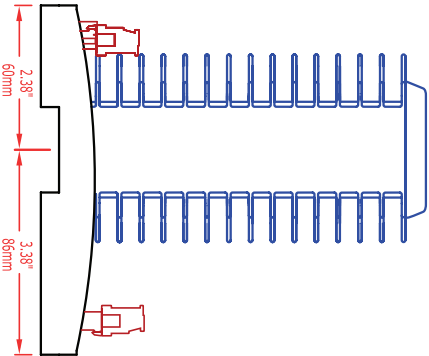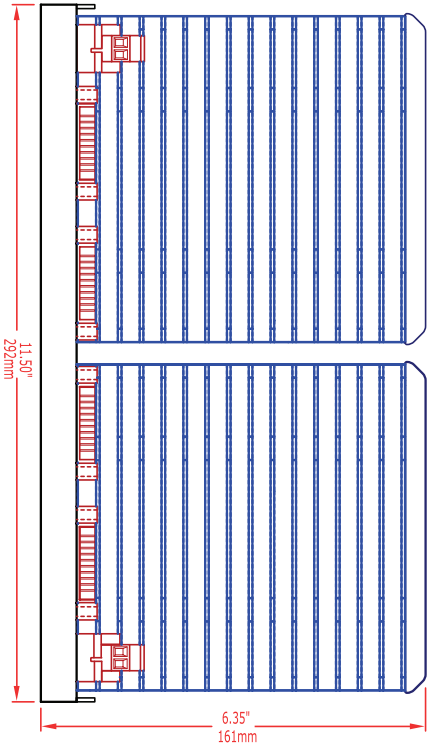


The Shield Ground Option is available on revision D.0 and later units.

CAD drawings are available on-line at [www.mtl-inst.com](http://www.mtl-inst.com)

F880 fieldbus power system

April 2022

F880-P\* DIMENSIONS

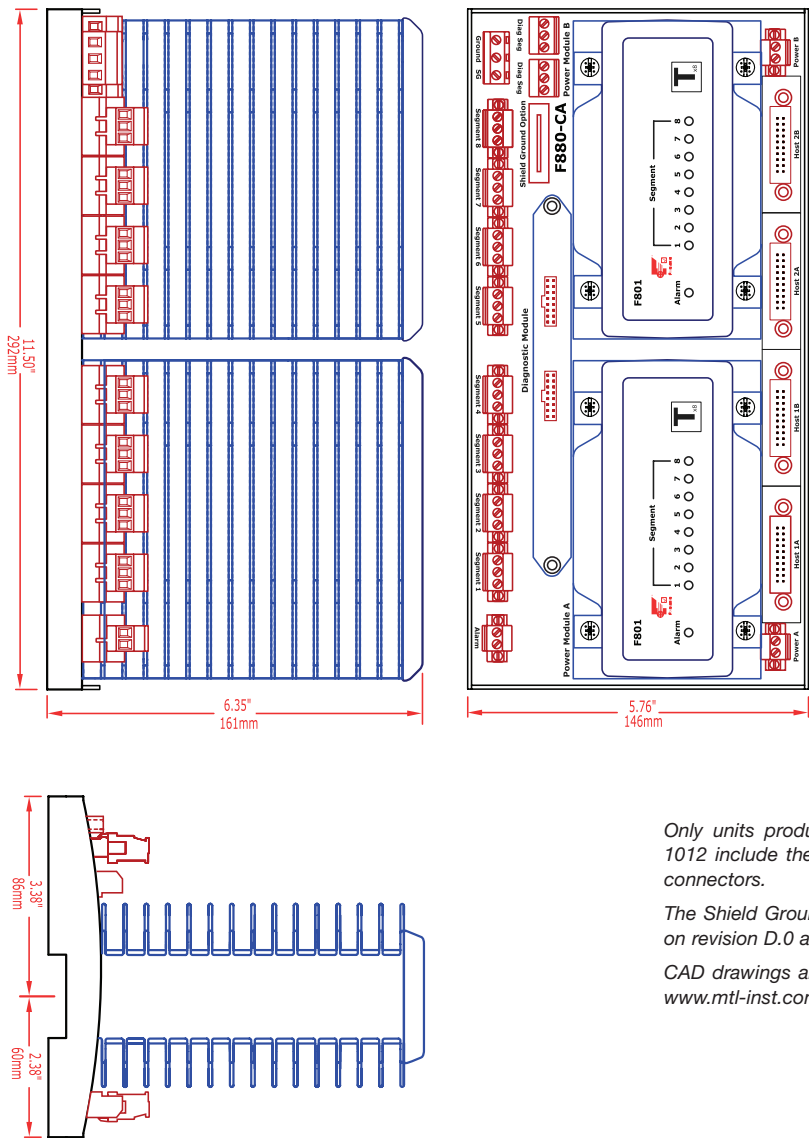

Only units produced after date code 1012 include the Diagnostic Segment connectors.

The Shield Ground Option is available on revision D.0 and later units.

CAD drawings are available on-line at [www.mtl-inst.com](http://www.mtl-inst.com)

APPROVALS - for the latest certification information visit [www.mtl-inst.com/support/certificates/](http://www.mtl-inst.com/support/certificates/)

Region (Authority)	Standard	Certificate	Approved for	Ratings
EU (Relcom)	EN61326		Class A Industrial Locations	CE
(Fieldbus Foundation™)	FF-831	PS001700 - (F801) PS001900 - (F802)		Power Supply Type 132
US (FM)	3600, 3611, 3610	3025124 - (F801) 3033657 - (F802)	Class I, Div 2, ABCD, T4 Class I, Zone 2, IIC, T4	Vmax = 24V (F801) = 30V (F802)
Canada (FM)	C22.2 No. 213 C22.2 No. 142	3025124C - (F801) 3033657C - (F802)	Class I, Div 2, ABCD, T4 Class I, Zone 2, IIC, T4	Vmax = 24V (F801) = 30V (F802)
EU (Relcom)	EN 60079-0 EN 60079-15	RELCO7ATEX1002X (F801 + F802)	⊕ II 3 G Ex nA IIC T4 Gc	Uo = 24V (F801) = 30V (F802)
UKCA (Relcom)	EN 60079-0 EN 60079-15	RELC21UKEX1014X	⊕ II 3 G Ex nA IIC T4 Gc	Uo = 24V (F801) = 30V (F802)



**Eaton Electric Limited,**  
Great Marlings, Butterfield, Luton  
Beds, LU2 8DL, UK.  
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283  
E-mail: [mtlenquiry@eaton.com](mailto:mtlenquiry@eaton.com)  
[www.mtl-inst.com](http://www.mtl-inst.com)

© 2022 Eaton  
All Rights Reserved  
Publication No. EPS F880 Rev 12 070422  
April 2022

**EUROPE (EMEA):**  
+44 (0)1582 723633  
[mtlenquiry@eaton.com](mailto:mtlenquiry@eaton.com)

**THE AMERICAS:**  
+1 800 835 7075  
[mtl-us-info@eaton.com](mailto:mtl-us-info@eaton.com)

**ASIA-PACIFIC:**  
+65 6 645 9888  
[sales.mtlising@eaton.com](mailto:sales.mtlising@eaton.com)

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.