

MTL2210B SWITCH OPERATED RELAY

1-channel

The MTL2210B enables two 500VA safe-area loads to be controlled in separate circuits simultaneously by one light-duty on/off switch in a hazardous area. Alternatively, it can be arranged to latch for pushbutton stop/start control of an electric motor, the relay then being energised by brief closure of one switch contact and de-energised by the brief opening of another. The stop switch overrides the start switch, even if the start circuit is closed, making sure that the motor can be turned off under all conditions. In this application, the second pair of changeover output contacts enables the status of the motor to be fed to a computer or data logger.

SPECIFICATION

See also 'Common specification'

Number of channels

One, fully floating

Location of switch(es)

Zone 0, IIC, T6 hazardous area
Div 1, Group A, hazardous location

Voltage applied to switch(es)

5.6V dc from 1.5k Ω

Input/output characteristics

Relay energised if <200 Ω
between terminals 1 & 2 and 3 & 4
Relay de-energised if >500 Ω
between terminals 1 & 2* or 3 & 4
Hysteresis, nominal 100 Ω

*Non-latching mode

Latching facility

(Enabled by linking terminals 5 & 6)
Relay then latches ON when energised (shorts terminals 1 & 2)
Relay de-energised if unlatch circuit broken (latching)

Power supply failure protection

Relay de-energised if supply fails

Broken line protection

Relay de-energised if either line broken (non-latching)
Relay de-energised if unlatch circuit broken (latching)

'Fail-safe' earth fault protection

(Enabled by connecting terminal 8 to earth) Relay de-energised if <1k Ω to earth, total for all 3 lines
Relay not de-energised if >7.5k Ω to earth, total for all 3 lines

'No-fail' earth fault protection

(Enabled by connecting terminal 8 to MTL4220)
Fault on any line proclaimed: unit continues working

Response time

50ms, nominal

Contacts

2-pole changeover

Contact rating

250V:5A:500VA (ac) (resistive loads, reactive loads must be suppressed)
250V:5A:250W (dc) (resistive loads, reactive loads must be suppressed)


Contact life expectancy

2 x 10⁵ operations at maximum load

LED indicator

ON when relay energised

MTL2210B

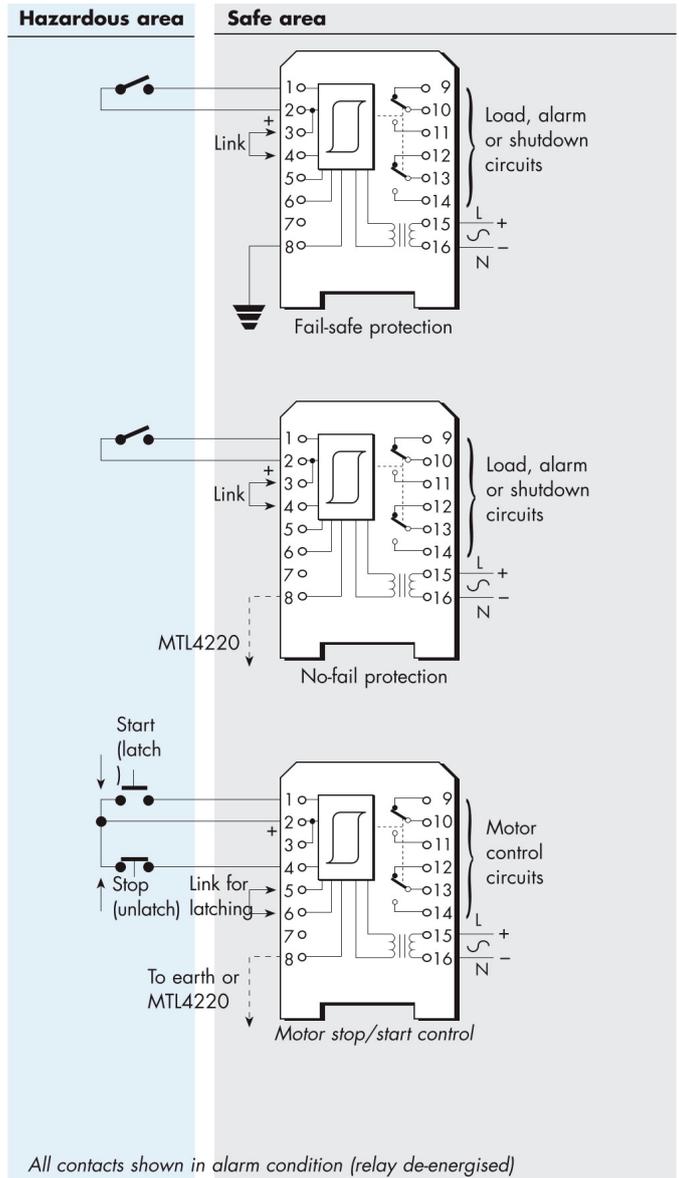

Consumption

0.9 to 1.4W (ac versions)
60mA (24V dc version)

Ambient temperature limits

-20 to +55°C (all versions, close packed)
-20 to +60°C (all versions, at least 5mm apart)
-40 to +80°C (all versions, storage)

Safety description

7V, 300 Ω , 22mA

FM max entity parameters

Voc = 8.3V, Isc = 26mA, Ca = 7 μ F, La = 47mH



Powering Business Worldwide

Eaton Electric Limited,
Great Marlings, Butterfield, Luton
Beds, LU2 8DL, UK.
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
E-mail: mtl enquiry@eaton.com
www.mtl-inst.com

© 2016 Eaton
All Rights Reserved
Publication No. EPS 2000 range rev2
September 2016

EUROPE (EMEA):
+44 (0)1582 723633
mtl enquiry@eaton.com

THE AMERICAS:
+1 800 835 7075
mtl-us-info@eaton.com

ASIA-PACIFIC:
+65 6 645 9888
sales.mtl@sing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.