

# MTL4573Y

## TEMPERATURE CONVERTER

### THC or RTD input

The MTL4573Y converts a low-level dc signal from a temperature sensor mounted in a hazardous area into a 4/20mA current for driving a safe-area load. Software selectable features include linearisation, ranging, monitoring, testing and tagging for all thermocouple types and 2-, 3- or 4-wire RTDs. (For thermocouple applications the HAZ-CJC plug on terminals 1–3 includes an integral CJC sensor). Configuration is carried out using a personal computer.

#### SPECIFICATION

See also common specification

#### Number of channels

One

#### Location of signal source

Zone 0, IIC, Hazardous area

Division 1, Groups A-D, hazardous location

#### Signal source

Input	Type		Min. span
THC	J,K,T,E,R,S,B,N	BS EN 60584-1:1996	3mV
	XK	GOST P8.585-2001	
mV	-75 to +75mV		3mV
RTD	Pt100, Pt500, Pt1000	BS EN 60751:2008	10,50,100Ω
	Cu-50, Cu-53	GOST 6651-94	10Ω
	Ni100, Ni500, Ni1000	DIN43760:1985	10,50,100Ω
Resistance	0 to 400Ω		10Ω

#### RTD excitation current

200μA nominal

#### Cold junction compensation, THC input

Selectable ON or OFF

#### Cold junction compensation error

± 1.0°C

#### Common mode rejection

120dB for 240V at 50Hz or 60Hz

#### Series mode rejection

40dB for 50Hz or 60Hz

#### Calibration accuracy (at 20°C)

(includes hysteresis, non-linearity and repeatability)

##### Inputs:

mV/THC: ± 15μV or ± 0.05% of input value (whichever is greater)

Pt 100 - RTD: ± 80mΩ

Output: ± 11μA

#### Temperature drift (typical)

##### Inputs:

mV/THC: ± 0.003% of input value/°C

Pt 100 - RTD: ± 7mΩ/°C

Output: ± 0.6μA/°C


#### Example of calibration accuracy and temperature drift (RTD input)

Span: 250Ω

Accuracy: ± (0.08/250 + 11/16000) × 100%  
= 0.1% of span

Temperature drift: ± (0.007/250 × 16000 + 0.6) μA/°C  
= ±1.0μA/°C

#### MTL4573Y

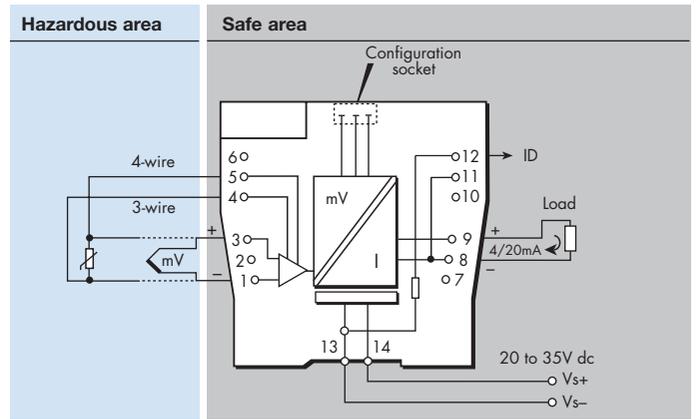

#### Safety drive on sensor failure

Upscale, downscale, or off

#### Early burnout

Early burnout detection for thermocouples (when selected)

EBD indicated when loop resistance increase is > 50Ω

#### Output range

4 to 20mA nominal into 600Ω max.

Out of range characteristic - MTL or NAMUR NE43

#### Maximum lead resistance (THC)

600Ω

#### Response time

Typical 500 ms

#### LED indicator

Green: EBD alarm indication, power and status indication

Yellow: alarm indication

#### Maximum current consumption (with 20mA signal)

50mA at 24V

#### Power dissipation within unit (with 20mA signal)

1.2W at 24V

#### Safety description

Refer to certificate for parameters.  $U_m=253V$  rms or dc

#### Configurator

A personal computer running MTL PCS45 software with a PCL45USB serial interface.

#### ID Resistor

7k5Ω

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



Powering Business Worldwide

#### Eaton Electric Limited,

Great Marlings, Butterfield, Luton  
Beds, LU2 8DL, UK.  
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283  
E-mail: mtlenquiry@eaton.com  
www.mtl-inst.com

© 2019 MTL  
All Rights Reserved  
Publication No.  
EPS4573YRev 2 010219

#### EUROPE (EMEA):

+44 (0)1582 723633 mtlenquiry@eaton.com

#### THE AMERICAS:

+1 800 835 7075 mtl-us-info@eaton.com

#### ASIA-PACIFIC:

+65 6 645 9888 sales.mtlsing@eaton.com