



HMI & Remote PC Terminals for industrial and hazardous areas – Ex Zone 1 / 2 / 21 / 22

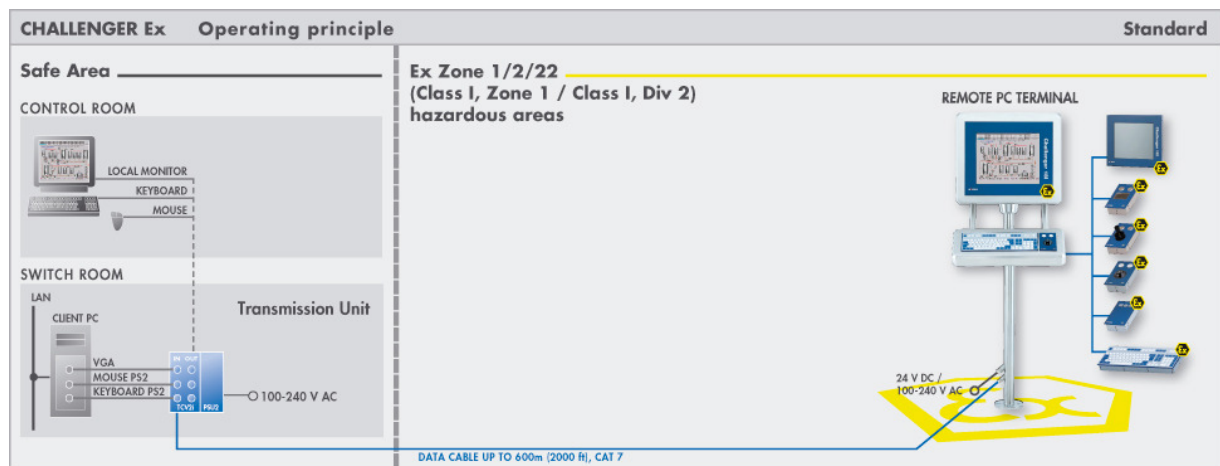
GECMA Components GmbH, Postfach 4146, D-50155 Kerpen

TECHNICAL DATASHEET




CHALLENGER

Remote PC Terminal for hazardous areas - zone 1/2 (Gas), -22* (Dust)

Standard Configuration CHALLENGER18i



The CHALLENGER Remote PC Terminals represents the modern form of local operation in the production plant. All components for operation and visualisation are made intrinsically safe and certified world-wide. In this way configuration according to the specific conditions of the production plant is made possible. The configuration listed here is the standard - further configurations can be found under <http://www.gecma.com/configurator>

Article Code	Product Description	Technical Description
C-E—FMO-18i 	<ul style="list-style-type: none"> - TFT Display as intrinsically safe module - 19 inch screen diagonal - Glass front with an anti-reflective chemical coating - SXGA resolution (1280 x 1024 pixel) - 16 million colours - Operating temperature range -10°C to +60°C - Extendable to -30°C to +60°C - Panel mount design 	<ul style="list-style-type: none"> - Ingress protection IP 66/NEMA 4X from front - ATEX: DMT 00 ATEX E 089 X, II 2G EEx ib IIC T4 - UL/cUL-listed: Class I, Zone 1, AEx ib IIC T4, Ex ib IIC T4, File E 232869 - UL/cUL-listed: Class I, Div. 2, Groups A,B,C,D T4 File E 232869 - GOST-R/GGTN, IECEx, TIIS, NEPSI...certified
C-E-KBi 	<ul style="list-style-type: none"> - Keyboard as intrinsically safe module - Foil-protected short stroke keyboard - Resistant to many solvents - IBM compatible with 105 keys - Layouts: English (QY) - Special layouts on request - Operating temperature range -10°C to +60°C - Extendable to -30°C to +60°C - Panel mount design 	<ul style="list-style-type: none"> - Ingress protection IP 66/NEMA 4X from front - ATEX: DMT 00 ATEX E 089 X, II 2G EEx ib IIC T4 - UL/cUL-listed: Class I, Zone 1, AEx ib IIC T4, Ex ib IIC T4, File E 232869 - UL/cUL-listed: Class I, Div. 2, Groups A,B,C,D T4 File E 232869 - GOST-R/GGTN, IECEx, TIIS, NEPSI...certified
C-E-Mi 	<ul style="list-style-type: none"> - Industrial mouse with 2 keys as intrinsically safe module - Left and right click buttons - 4-step pressure-sensitive mouse guidance - Operating temperature range -10°C to +60°C - Extendable to -30°C to +60°C - Panel mount design 	<ul style="list-style-type: none"> - Ingress protection IP 66/NEMA 4X from front - ATEX: DMT 00 ATEX E 089 X, II 2G EEx ib IIC T4, - UL/cUL-listed: Class I, Zone 1, AEx ib IIC T4, Ex ib IIC T4, File E 232869, - UL/cUL-listed: Class I, Div. 2, Groups A,B,C,D T4 File E 232869 - GOST-R/GGTN, IECEx, TIIS, NEPSI...certified



HMI & Remote PC Terminals for industrial and hazardous areas – Ex Zone 1 / 2 / 21 / 22

GECMA Components GmbH, Postfach 4146, D-50155 Kerpen

C-E-PSU14i/8/543



- Power supply for 19" FMO display, keyboard, pointing device
- 24V DC / 3 A, (100-240V AC on request)
- Operating temperature range -10°C to +60°C
- Extendable to -30°C to +60°C
- Ingress protection IP54
- ATEX: DMT 00 ATEX E 090, II 2G EEx qe [ib] IIC T4
- UL/cUL-listed: Class I, Zone 1, AEx qe [ib] IIC T4, Ex qe [ib] IIC T4, File E 232869
- UL/cUL-listed: Class I, Div. 2, Groups A,B,C,D T4 File E 232869
- GOST-R/GGTN, IECEx, TIIS, NEPSI...certified

C-E-VGA/PS2-1.8m



- VGA/PS2 cable lead PC to TCV2 Euro card
- Length: 1.8 m

C-E-TCV2i



- Transmission card TCV2i as 19" Euro card (3 U).
- Incl. ports for VGA/PS2 for local operation mouse/keyboard
- Including separate USB/PS2 converter
- Power supply via the preassembled PSU2 Euro card
- ATEX: DMT 00 ATEX E 089 X, II (2)G [EEx ib] IIC
- UL-listed: Class I, Zone 1, AEx [ib] IIC, Ex [ib] IIC, File E 232869
- UL/cUL-listed: Class I, Div. 2, Groups A,B,C,D T4 File E 232869
- GOST-R/GGTN, IECEx, TIIS, NEPSI...certified

C-E-TP6-BL



- 100 m data cable blue 600 MHz / CAT 7
- 4 x 2 solid conductor STP cable
- Each pair individually foil screened with overall braided wire screen

ST-FHP-18



- Hygienic, ergonomic field desk housing
- To house display, keyboard, pointing device or card reader
- Depth 200 mm
- Ingress protection IP 66/NEMA 4X from front including components integrated
- Keyboard inclined by 30°
- Stainless steel 304/1.4301
- Polished to 240 granulation

ST-STF-MB



- Hygienic stainless steel pipe with flange
- Stainless steel 304/1.4301
- For floor or ceiling mounting
- Includes coupling MB and 2 screwed cable glands (M25/M20)
- Ingress protection IP 66/NEMA 4X
- Coupling MB allows rotation of 300 degrees
- Standard length 1260 mm
- Special length on request
- Outside diameter 60.3 mm

C-E-R84-2



- Pre-assembled 19" slide-in module carrier, 3U
- Including PSU2 card (Power Supply)
- 100-240V AC 50/60 Hz supply via IEC socket
- 8 x 10 pole connectors for data cable

* If used together with for dust areas certified FHP enclosures

Technical data sheets are subject to modifications and amendments / No liability for misprints and errors.