

# MTL4500 SERIES COMMON SPECIFICATION

Please go to our website at [www.mtl-inst.com](http://www.mtl-inst.com) for the latest information regarding safety approvals, certificates and entity parameters.

## Connectors

Each MTL4500 unit is supplied with signal connectors, as applicable.

When using crimp ferrules for the hazardous and non-hazardous (safe) signal connectors the metal tube length should be 12mm and the wire trim length 14mm.

## Isolation

250V rms, tested at 1500V rms minimum, between safe- and hazardous-area terminals.

50V between safe-area circuits and power supply

## Supply voltage

20 – 35V dc

## Location of units

Safe area

## Terminals

Accepts conductors of up to 2.5mm<sup>2</sup> stranded or single-core

## Mounting

MTL4500 series backplanes

## Ambient temperature limits

-20 to +60°C (-6 to +140°F) operating

-40 to +80°C (-40 to +176°F) storage


## Humidity

5 to 95% relative humidity

## Weight

110g approximately (except where indicated)

## DIMENSIONS (mm)

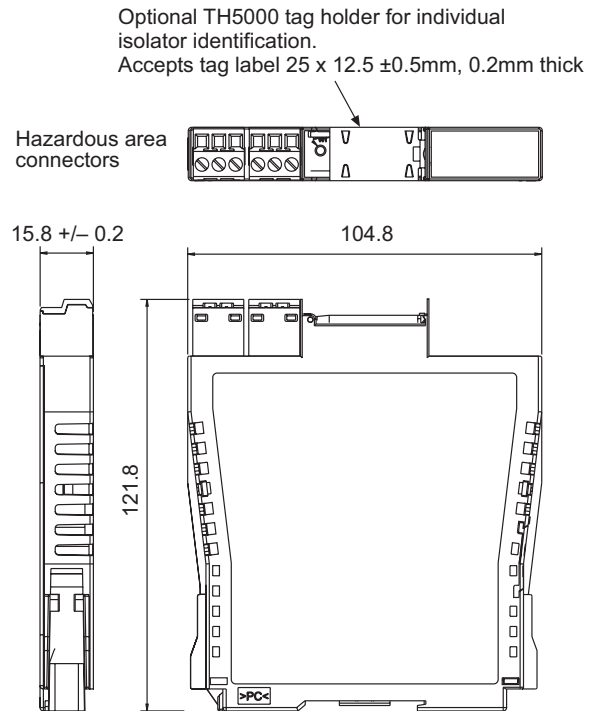

HART® is a registered trademark of HART Communication Foundation



EUROPE (EMEA)  
AMERICAS  
ASIA PACIFIC

Tel: +44 (0)1582 723633  
Tel: +1 603 926 0090  
Tel: +65 6 487 7887

Fax: +44 (0)1582 422283  
Fax: +1 603 926 1899  
Fax: +65 6 487 7997

E-mail: [enquiry@mtl-inst.com](mailto:enquiry@mtl-inst.com) Web site: [www.mtl-inst.com](http://www.mtl-inst.com)