

MTL4041P HIGH-POWER REPEATER POWER SUPPLY

4/20mA, smart, for 2- or 3-wire transmitters



The MTL4041P provides a fully floating dc supply for energising a conventional 2- or 3-wire 4/20mA transmitter or a 'smart' transmitter located in a hazardous area, and repeats the current in another circuit to drive a safe-area load. For smart transmitters, the unit allows bi-directional transmission of digital communication signals superimposed on the 4/20mA signal so that the transmitter can be interrogated either from the operator station or by a hand-held communicator (HHC). The module can also be used with hazardous-area current sources. The MTL4041P is a high-power version of the MTL4041B, suitable for all gas groups provided that the field equipment is suitably certified.

SPECIFICATION

See also common specification, cable parameters and approvals

Number of channels

One

Location of transmitter

Zone 0, IIC, T4-6 hazardous area if suitably certified
Div.1, Group A, hazardous location

Voltage available for transmitter and lines

16.3V minimum at 20mA

Note: maximum open-circuit voltage is 28V

Input and output signal range

4 to 20mA

Over-/under-range

1.0mA to 21.5mA

Digital signal bandwidth

10Hz to 8kHz

Safe-area circuit load resistance

Conventional transmitters: 0 to 650Ω

Smart transmitters: 250Ω ±10%

Safe-area circuit output resistance

>1MΩ

Safe-area circuit ripple

<50μA peak-to-peak up to 80kHz

Transfer accuracy at 20°C

Better than 20μA

Temperature drift

<1μA/°C

Response time

Settles within 200μA of final value within 20ms

LED indicator

Green: one provided for power indication

Power requirement, V_s

65mA at 24V dc with 20mA signal

75mA at 20V dc

50mA at 35V dc

Power dissipation within unit

1.2W at 24V with 20mA signal

1.4W at 35V

Isolation

250V ac between safe- and hazardous-area circuits

Safety description


Terminals 2 to 5 and 6

28V, 240Ω, 116.6mA

Terminals 5 to 6

Non-energy storing apparatus ≤1.2V, ≤0.1A, ≤20μJ and ≤25mW; can be connected without further certification into any IS loop with open-circuit voltage not more than 28V

Note: Terminals 5 and 6 do not support HART® communications.

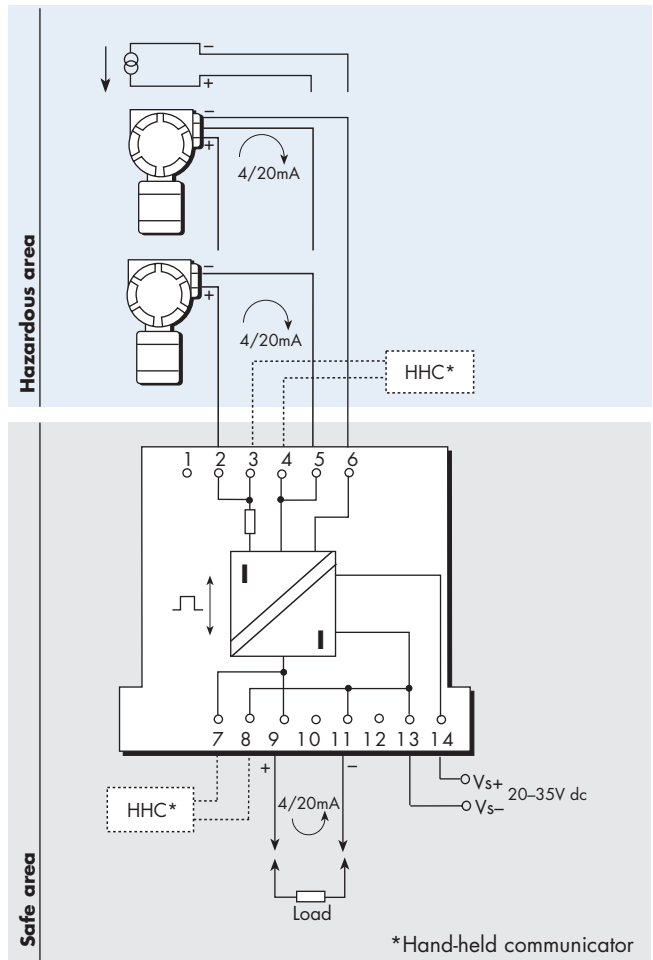

Terminal	Function
2	Tx supply +ve
3	Optional HHC connection +ve
4	Optional HHC connection -ve
5	Current input
6	Common
7	Optional HHC connection +ve
8	Optional HHC connection -ve
9	Output +ve
11	Output -ve
13	Supply -ve
14	Supply +ve

FM entity parameters

Terminals 2 and 5

V_{oc} = 28V dc, I_{sc} = 118mA, C_a = 0.14μF, L_a = 2.76mH

Terminals 2, 3, 4, 5 and 6

V_t = 28V dc, I_t = 166mA, C_a = 0.14μF, L_a = 1.41mH



EUROPE (EMEA)
AMERICAS
ASIA PACIFIC
E-mail: enquiry@mtl-inst.com

Tel: +44 (0)1582 723633
Tel: +1 603 926 0090
Tel: +65 487 7887

Fax: +44 (0)1582 422283
Fax: +1 603 926 1899
Fax: +65 487 7997

Web site: www.mtl-inst.com