

MTL5344 REPEATER POWER SUPPLY

two channel, for 2 wire transmitters



The MTL5344 provides a fully floating dc supply for energising two conventional 2 wire 4/20mA transmitters located in the hazardous area, and repeats the current in other circuits to drive safe-area loads.

SPECIFICATION

Number of channels

Two

Location of transmitters

Zone 1, IIC, T4-6, hazardous area if suitably certified

Safe-area output

Signal range: 4 to 20mA
Over / under range: 0 to 20.1mA
Safe-area load resistance: 0 to 550Ω
Safe-area output resistance: 2MΩ

Safe-area circuit ripple

<125μA peak-to-peak

Hazardous-area input

Signal range: 0-20 1mA (including over-range)
Transmitter voltage: >14V at 20mA

Transfer accuracy at 20°C

Better than 20μA (typically 5μA)

Temperature drift

<1μA/°C

Response time

Settles within 10% of final value within 250μs

LED indicator

Green: one provided for power indication

Supply voltage

20 to 35V dc

Power requirement, Vs

122mA at 24V
150mA at 20V
90mA at 35V

Power dissipation within unit

2.0W max

Isolation

250V between safe and hazardous area circuits, and power supply.

Safety description

[EExib] IIC


$U_o = 19V$, $I_o = 24mA$ (non-linear), $P_o = 450mW$

[[$C_o = 120nF$, $L_o = 3mH$] Group IIC]

$U_m = 253V$ rms or dc

$U_i = 24V$, $I_i = 100mA$, $P_i = 1.35W$

$C_i = 0$, $L_i = 0$

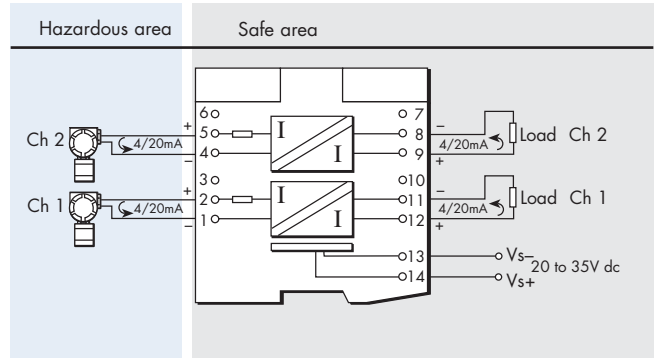

Terminal	Function
1	Input -ve(channel 1)
2	Input +ve(channel 1)
4	Input -ve(channel 2)
5	Input +ve(channel 2)
8	Output -ve(channel 2)
9	Output +ve(channel 2)
11	Output -ve(channel 1)
12	Output +ve(channel 1)
13	Supply -ve
14	Supply +ve



EUROPE (EMEA)
AMERICAS
ASIA PACIFIC
E-mail: enquiry@mtl-inst.com

Tel: +44 (0)1582 723633
Tel: +1 603 926 0090
Tel: +65 487 7887

Fax: +44 (0)1582 422283
Fax: +1 603 926 1899
Fax: +65 487 7997

Web site: www.mtl-inst.com