

# MTL4046/4046C ISOLATING DRIVER

for 4–20mA HART® valve positioners   
with line fault detection

The MTL4046 accepts a 4/20mA floating signal from a safe-area controller to drive a current/pressure converter (or any other load up to 800Ω) in a hazardous area. For HART valve positioners, the module also permits bi-directional transmission of digital communication signals so that the device can be interrogated either from the operator station or by a hand-held communicator (HHC). Process controllers with a readback facility can detect open or short circuits in the field wiring: if these occur, the current taken into the terminals drops to a preset level. The MTL4046C is identical to the MTL4046 except that it provides open circuit detection only (no short-circuit detection).

## SPECIFICATION

See also common specification, cable parameters and approvals

### Number of channels

One

### Location of I/P converter

Zone 0, IIC, T4–6 hazardous area if suitably certified  
Div. 1, Group A, hazardous location

### Working range

4 to 20mA

### Digital signal bandwidth

500Hz to 10kHz

### Maximum load resistance

800Ω (16V at 20mA)

### Minimum load resistance

90Ω (short-circuit detection at <50Ω)

### Output resistance

>1MΩ

### Under/over range capability

Under range = 1.0mA

Over range = 26.0mA (load ≤520Ω)

### Input and output circuit ripple

<40μA peak-to-peak

### Transfer accuracy at 20°C

Better than 20μA

### Input characteristics

<4.0V with the field wiring intact

<0.9mA with the field wiring open-circuit (and short-circuit on the MTL4046)

### Response time

Settles within 200μA of final value within 100ms

### Temperature drift

<1.0μA/°C

### LED indicator

Green: one provided for power indication

### Power requirement, Vs

58mA at 24V dc

70mA at 20V dc

40mA at 35V dc

### Power dissipation within unit

1.2W typical at 24V with 20mA loop current

1.4W worst case


### Isolation

250V ac between safe- and hazardous-area circuits

Input circuit is floating

### Safety description

28V, 300Ω, 93mA,  $U_m = 250V$  rms or dc

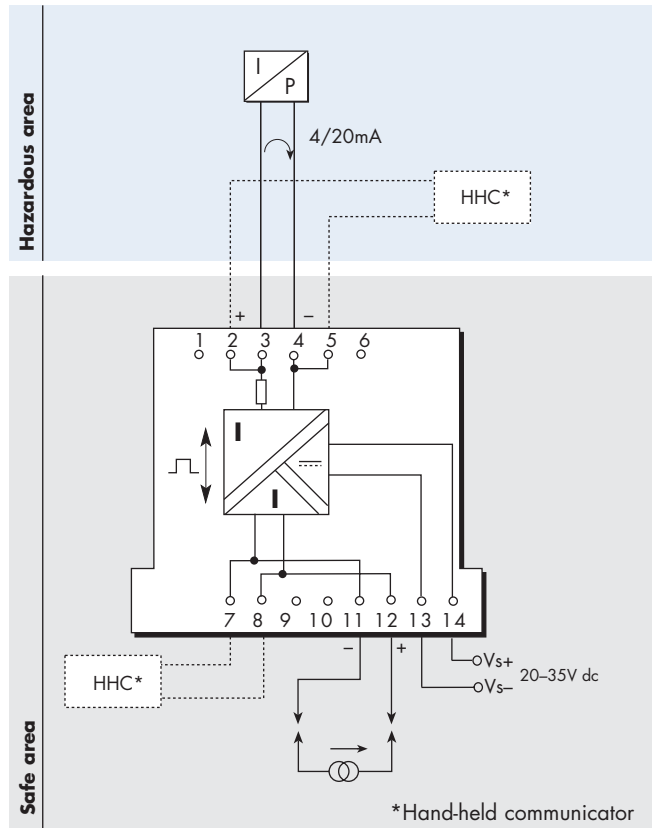

Terminal	Function
2	Optional HHC connection +ve
3	Output +ve
4	Output -ve
5	Optional HHC connection -ve
7	Optional HHC connection -ve
8	Optional HHC connection +ve
11	Input -ve
12	Input +ve
13	Supply -ve
14	Supply +ve

HART® is a registered trademark of HART Communication Foundation



EUROPE (EMEA)  
AMERICAS  
ASIA PACIFIC  
E-mail: enquiry@mtl-inst.com

Tel: +44 (0)1582 723633  
Tel: +1 603 926 0090  
Tel: +65 487 7887

Fax: +44 (0)1582 422283  
Fax: +1 603 926 1899  
Fax: +65 487 7997

Web site: www.mtl-inst.com

June 2004