

# MTL2000 & 3000 SERIES ENCLOSURES AND ACCESSORIES

for marshalling and protecting units in safe areas

- ◆ A standard enclosure holding up to 2, MTL2000 Series units or 4, MTL3000 Series units
- ◆ Constructed from durable, lightweight, impact-resistant, flame-retardant polycarbonate
- ◆ Transparent lid for inspecting units and LED indicators
- ◆ Dust-tight and water-jet proof to IEC 529:IP65

The UC enclosure provides a simple but effective means of mounting and protecting MTL interface units in safe areas. An enclosure is available, which can accommodate up to 2 MTL2000 Series units or 4 MTL3000 Series units. It provides protection against the ingress of dust and water to IEC 529: IP65. The enclosure enables interface units to be installed and wired up quickly without special tools, and is supplied with the necessary fixing attachments to allow the user to choose the most convenient of three methods of mounting.

Constructed from impact-resistant polycarbonate, the UC enclosure has a transparent lid to allow the interface units and their LED indicators to be viewed. The enclosure is fitted with top-hat rail so that the interface units can be clipped into position easily.

Mounting of the enclosure is normally by rear-fixing screws or screw-on fixing lugs, using the pre-tapped brass bushes moulded into the enclosures' base. Alternatively, if the enclosures are to be front mounted and close packed, a plastic membrane covering the inside of each tapped hole can be knocked out, allowing the passage of other screws. These enclosures are also supplied with plastic plugs to seal the knockout apertures and preserve the IP65 integrity of the enclosures if this method of fixing is used. Model UC2 does not require sealing plugs, because the knockout apertures are outside the enclosed compartment by virtue of the construction of the base. Dimensional details for mounting the enclosure, using all methods of fixing, are given overleaf.

Accessories for mounting units directly on 35mm DIN (top hat rail), or alternatively on flat surfaces using SMC2 mounting clips for MTL2000 units.

## SPECIFICATION

### Capacity

|                |         |
|----------------|---------|
| MTL2000 Series | 2 units |
| MTL3000 Series | 4 units |

### Construction

Base: glass-filled polycarbonate  
Lid: unfilled polycarbonate

### Finish

Base: model UC2 dark grey. Lid: transparent.

### Lid fixing

Captive fixing screws

### Protection

Dust-tight and water-jet proof to IEC 529:IP65

### Gland fixing

Model UC2: two 20mm holes pre-drilled through base side.

### Permitted location

Safe area

### Mounting

By corner screws or screw-on fixing lugs.

### 'Take Care' IS label

Adhesive front, inside lid. Provided on all models.

### Weight (kg, without units)

UC2: 0.6,


### Ambient temperature limits

Dependent on units fitted. See instruction sheet INS2930.

### NOTE:

To mount multiples of units use the DX Series of enclosures. See MTL5000 Series Enclosures

## ENCLOSURE (dimensions in mm)

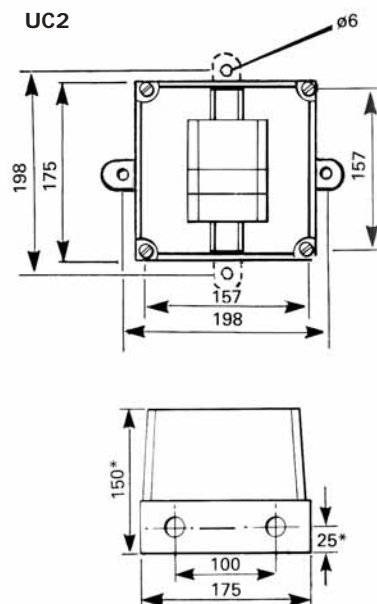

**TO ORDER, Specify enclosure number: UC2**



EUROPE (EMEA)  
AMERICAS  
ASIA PACIFIC  
E-mail: [enquiry@mtl-inst.com](mailto:enquiry@mtl-inst.com)

Tel: +44 (0)1582 723633  
Tel: +1 603 926 0090  
Tel: +65 487 7887

Fax: +44 (0)1582 422283  
Fax: +1 603 926 1899  
Fax: +65 487 7997

Web site: [www.mtl-inst.com](http://www.mtl-inst.com)