

MTL4619L

DIGITAL INPUT INTERFACE

1 channel for 24V-48V digital input signals

The MTL4619L is a single channel digital input module with a relay interface to the system. The relay is powered by the field signal.

SPECIFICATION

See also common specification

Number of channels

One, with fully floating output

Location of sensor

Safe area

Input

24V dc (22-32V)

48V dc (42-60V)

Output

Relay, dry contact 10W, 0.5A, 35V dc

Response time

8mS typical, 15mS maximum

Current consumption


14mA @ 24V

Power dissipation

0.4W @24V, 0.7W @ 48V

Isolation

250V RMS between any input and output

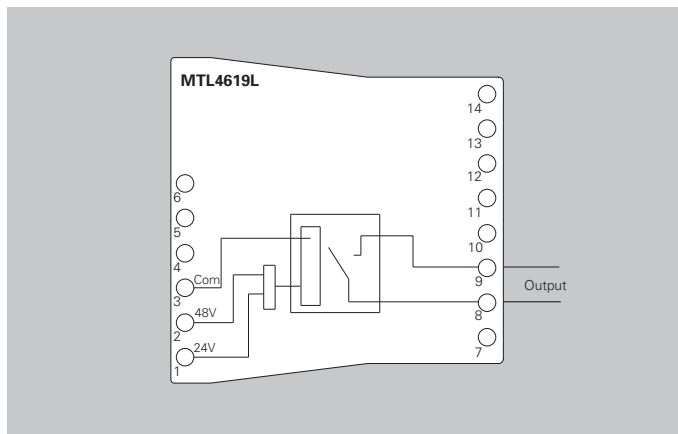

Terminals	Function
1	24V dc input
2	48V dc input
3	Common
8	Relay contact output
9	Relay contact output



Powering Business Worldwide

Eaton Electric Limited,
Great Marlings, Butterfield, Luton
Beds, LU2 8DL, UK.
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
E-mail: mtlenquiry@eaton.com
www.mtl-inst.com

© 2016 Eaton
All Rights Reserved
Publication No.
EPS MTL4619L Rev 1 010916

EUROPE (EMEA):
+44 (0)1582 723633 mtlenquiry@eaton.com
THE AMERICAS:
+1 800 835 7075 mtl-us-info@eaton.com
ASIA-PACIFIC:
+65 6 645 9888 sales.mtlsing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee.

In the interest of further technical developments, we reserve the right to make design changes.