


PART VIEW SHOWING GULLEY IN FLANGE BEHIND LID.

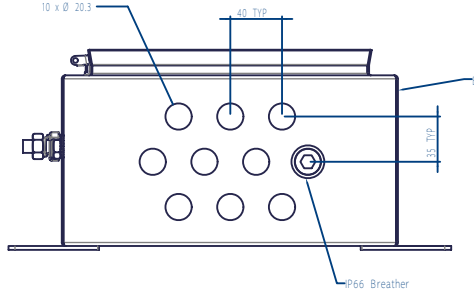

Enclosure - Ex-Cell, 316L stainless steel, body, 1.2mm thk, lid, 1.5mm thk, hinged lid with 1/4 turn lock.

IP66 Breather

NOTES :

1. EX-CELL - 262615, 1.2mm THK IP66 STAINLESS STEEL 316L ENCLOSURE, 1.5mm THK LID, WITH LEFT HAND HINGED LID & 3mm THK MOUNTING FLANGES.
2. INTERNAL/EXTERNAL M10 EARTH STUD FITTED, PLUS EARTH STRAP TO LID.
3. 1 x DIN RAIL TO EN50022 35 x 7.5 "I" SECTION, MOUNTED VERTICALLY. DIN RAIL FITTED WITH 2 END STOPS.
4. M20 HOLES DRILLED EQUI-SPACED ON BOTTOM FACE, AS REQUIRED. IP66 Exe CERTIFIED BREATHER PLUG FITTED IN POSITION SHOWN.
5. PRODUCT LABEL AND TAGGING LABEL (WHERE SPECIFIED), FITTED ONTO LID. ENCLOSURE PART No. LABEL FITTED INSIDE OF LID.
6. GULLY FORMED IN CHANNEL SECTION TO ENSURE WATER DOES NOT ENTER ENCLOSURE WHEN DOOR IS OPENED.
7. ENCLOSURE IS SUPPLIED WITH DIN RAIL MOUNTING MEGABLOCK DEVICE COUPLERS AND OTHER FIELDBUS CONNECTIVITY COMPONENTS AS REQUIRED FOR THE APPLICATION (SEE DATA SHEET). 1 x F308 IS SHOWN TO ILLUSTRATE A TYPICAL APPLICATION BUT NOT SUPPLIED WITH THE PRODUCT.

		This component / assembly to be in compliance with RoHS & REACH regulations.		Sheet: 1 of 1	
(Company Name) Ltd Great Harting, Bitterford, Loxton, Baffinborough, Brighton, BN1 6DQ Telephone: +44 (0)1323 724333 (9 AM - 5 PM) www.waton.com Email: info@waton.com		Drawing Number: CD-FCS-9608	Drawing Date: 8/19	Drawing By: CJD	Drawing Date: 8/19
Title: PROCESS JUNCTION BOX, SS B SPUR		Revision: 1		Date: 12	