


MTL WWIP-N range

Transmitter protection for water/wastewater industries

- **Corrosion resistant water/wastewater field instrument protection**
- **Protects 2 wire instruments**
- **Easy and direct mounting — screws into spare conduit entry**
- **Parallel connection avoids introduction of any resistance into loop**
- **High Performance low cost protection**
- **10 year product warranty**

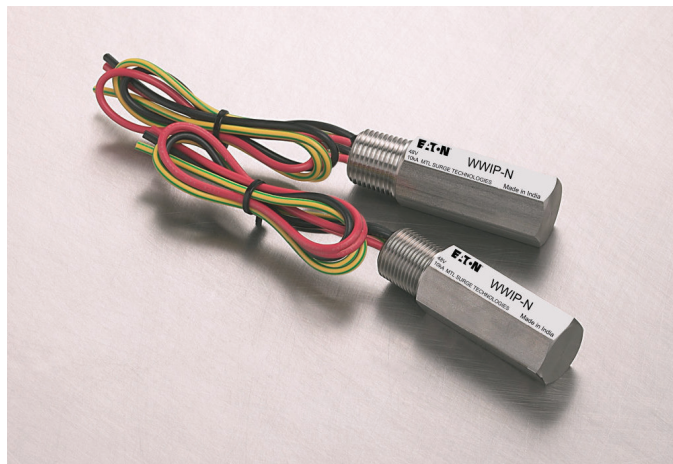

The WWIP-N range of surge protection devices uniquely provide a level of protection for 2 wire field-mounted instruments that is far in excess of the optional transient protection facilities available from the transmitter manufacturers- without involving any additional wiring, conduit modifications or other expensive extras.

The WWIP-N range consists of high-power, solid-state electronics and a gas-filled discharge tube (GDT) capable of diverting 10kA impulses. Specially designed for the water/wastewater industry with the whole unit encased in a corrosion resistant ANSI 316 stainless steel housing. The units are threaded for the common conduit entries used on field instruments. The WWIP-N is available for 1/2" NPT threaded entries.

Installation can easily be carried out retrospectively to existing installations. The WWIP-N is screwed into any unused conduit entry on the field instrument case and flying leads are connected to the terminal block (+ve, -ve) and the internal earth stud. The WWIP-Ns operate without in any way affecting normal operation- passing ac or dc signals without attenuation while diverting surge currents safely to earth and clamping output voltages to specific levels.

The all-important earthing connection is made to the local casing of the transmitter with no separate earth connection or ground stake at the transmitter being needed. In operation, the WWIP-N makes sure that the transmitter electronics are never exposed to damaging transients between lines or between lines and casing/earth. Any surge current appearing as a series-mode or common-mode transient is converted into a common-mode voltage- whereupon the transmitter electronics are temporarily raised to some higher voltage level before 'floating' down automatically (and without damage) to resume normal operation.

MTL WWIP-N range

October 2016

SPECIFICATION

Maximum surge current

10kA peak current (8/20µs waveform)

Leakage current

Less than 10µA at max. working voltage

Working voltage

24-48VDC

Bandwidth

1MHz

Resistance

No resistance introduced into loop

Ambient temperature limits

-40°C to +85°C

(-40°F to +185°F) (working)

-40°C to +85°C

(-40°F to +185°F) (storage)

Humidity

5% to 95% RH (non-condensing)

Electrical connections

3 flying leads (line1, line 2 & earth)

Wire size: 32/0.2 (1.0mm², 18 AWG)

Lead length: 250mm (minimum)

Casing

ANSI 316 stainless steel hexagonal bar stock, male thread

Threads

1/2" NPT

Weight

175g (6.2oz)

Dimensions

See figure 1

Model		WWIP-N
Nominal Voltage	U_n	24-48V
Rated Voltage (MCOV)	U_c	58V
Nominal Current	I_n	N/A
Nominal Discharge Current (8/20µs)	i_{sn}	3kA
Max. Discharge Current (8/20µs)	I_{max}	10kA
Lightning Impulse Current (10/350µs)	I_{imp}	1.2kA
Residual Voltage @ i_{sn}	U_p	95V, L-G 500V
Voltage Protection Level @ 1kV/µs	U_p	<76V
Bandwidth	f_G	1MHz
Capacitance	C	100pF
Series Resistance	R	N/A
Operation Temperature Range		-40°C to +85°C
Category Tested		A2, B2, C1, C2, C3, D1
Overstressed Fault Mode $i_n=3kA$		12kA
Impulse Durability (8/20µs)		10kA
Degree of Protection		IP66
AC Durability		1Arms, 5T
Service Conditions		80kPa-160kPa, 5%-95% RH

TO ORDER SPECIFY: WWIP-N

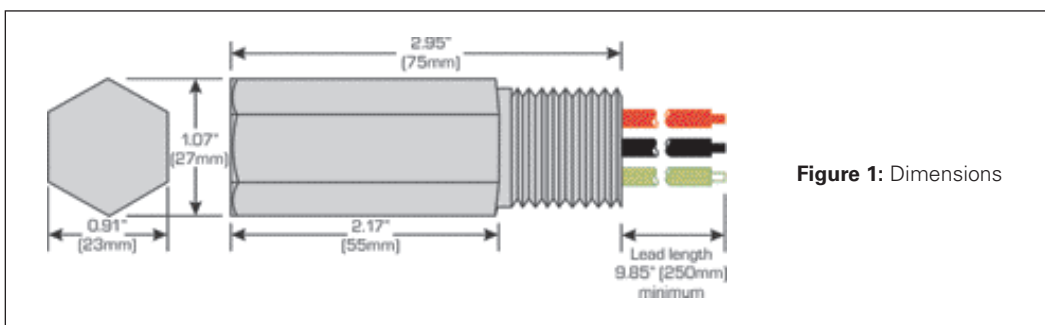


Figure 1: Dimensions



Eaton Electric Limited,
Great Marlings, Butterfield, Luton
Beds, LU2 8DL, UK.
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
E-mail: mtlenquiry@eaton.com
www.mtl-inst.com

© 2016 Eaton
All Rights Reserved
Publication No. EPS WWIP-N rev 2 041016
October 2016

EUROPE (EMEA):
+44 (0)1582 723633
mtlenquiry@eaton.com

THE AMERICAS:
+1 800 835 7075
mtl-us-info@eaton.com

ASIA-PACIFIC:
+65 6 645 9888
sales.mtlsing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.