

MTL 9491-PS-PLUS

12V DC intrinsically safe power supply

- Isolated power supply
- Zone 2 mountable
- DIN-rail or backplane mounting
- ATEX / IECEx certified
- 200mA @ 10.9V DC - Ex ia IIB
- 400mA @ 11.8V DC - Ex ib IIB output
- Power over Ethernet option
- Multiple outputs achieved by ganging 9491-PS-PLUS modules using 24V DC power distribution backplane
- Wide operating temperature -40°C to $+70^{\circ}\text{C}$



The **MTL 9491-PS-PLUS** takes a 24V DC safe area / Zone 2 supply and produces an intrinsically safe, 12V DC nominal output capable of powering devices mounted in a Zone 0 (ia) or Zone 1 (ib) hazardous area. The 9491-PS-PLUS may be mounted in a safe area or Zone 2 hazardous area.

Each **9491-PS-PLUS** provides a single IS output with connections for Ex ia and also Ex ib to suit different applications. In order to provide multiple outputs, the 9491-PS-PLUS power supply module is ganged up to the required number of ways, either DIN-rail mounted or using the power distribution backplane to simplify the 24VDC input connection to the modules.

The **9491-PS-PLUS** module has **LED power indication** for both input and output along with internal current limiting and electronic auto-reset circuit breaker action to protect the module in the event of its output being short circuited or overloaded. This also minimises the power dissipation during the fault to a negligible level, thus improving reliability.

The output can be from either the **Ex ia IIB** or **Ex ib IIB output connectors** depending upon application. The 'ib' IIB output provides a higher useable output power where the Gas Group and Zone allows.

12V DC intrinsically safe power supply

February 2021

SPECIFICATION

See also System Specification

POWER INPUT

Separately powered

Input voltage

24V DC (20–30V)

Input current

350mA

Input protection

Fuse + supply reversal diode

Connectors (see dimension drawing)


DIN rail mounting: screw terminals – capacity 2.5mm² stranded or single core

Backplane mounting: multipin connector


POWER OUTPUT

[Ex ia] output (pins 1 & 3)

Graph shows normal working range & total available range

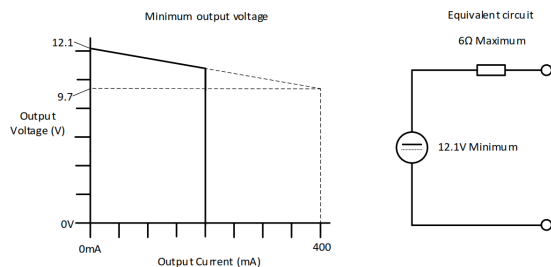

[Ex ib] output (pins 5 & 6)

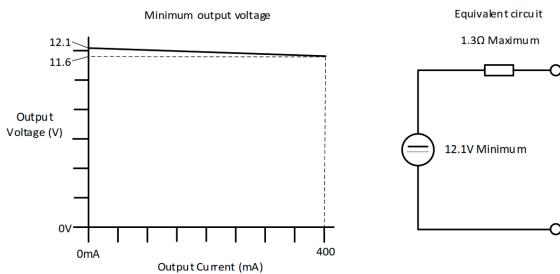

Connectors

9491-PS-PLUS is supplied with two IS output connectors.

Capacity 2.5mm² stranded or single core

(When using crimp ferrules for the IS connectors the metal tube length should be 12mm and the wire trim length 14mm.)

ISOLATION

Isolation - input to output

Um = 253V rms

SAFETY

Location of module

Safe area, Zone 2

Location of field wiring

[Ex ia] output

Zone 0, IIB hazardous area

[Ex ib] output

Zone 1, IIB hazardous area



Powering Business Worldwide

Eaton Electric Limited,
Great Marlings, Butterfield, Luton
Beds, LU2 8DL, UK.
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
E-mail: mtlenquiry@eaton.com
www.mtl-inst.com

© 2021 Eaton
All Rights Reserved
Publication No. EPS 9491-PS-PLUS Rev 1
February 2021


Certification Code

See approvals

Safety description

See certificates CML 15ATEX2071X, CML ATEX 4072X, IECEx CML 15.0034X

DIMENSIONS (mm)

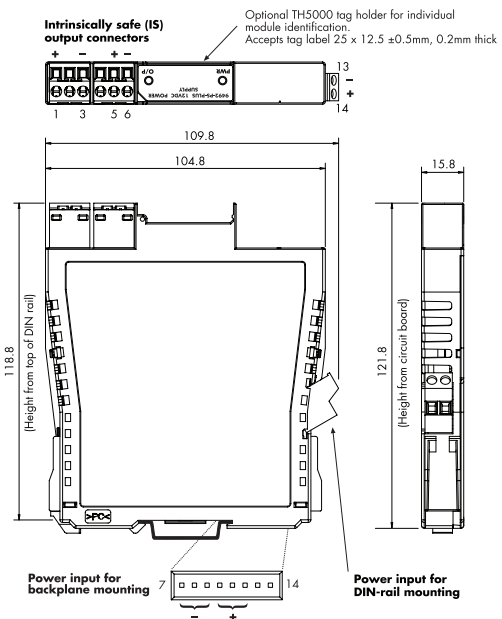

MECHANICAL

Mounting

DIN rail

Please contact Eaton MTL product line for 'backplane' option

Dimensions

See diagram

Weight

130 g

ENVIRONMENTAL

Ambient temp

Operating –40°C to +70°C

Storage –40°C to +70°C

Relative Humidity

5 to 95% RH (non-condensing)

Ingress Protection

Select enclosure to suit application, see certificate for information

LED INDICATORS

| | OFF | Flash | ON |
|--------------------|----------------|------------------------------------------|--------------|
| Pwr (green) | 24V power fail | N/A | 24V power OK |
| IS (green) | IS power fail | output overload or short circuit present | IS power OK |

EUROPE (EMEA):
+44 (0)1582 723633
mtlenquiry@eaton.com

THE AMERICAS:
+1 800 835 7075
mtl-us-info@eaton.com

ASIA-PACIFIC:
+65 6 645 9888
sales.mtlsing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.