

# MTL 9493-PS-XXX

## Intrinsically safe power supply

- Isolated power supply
- Zone 2 mountable
- DIN-rail or backplane mounting
- ATEX / UKEX / IECEx certified
- Range of Ex ia output voltages available
- Power over Ethernet option
- Multiple outputs achieved by ganging 9493-PS-XXX modules using 24V DC power distribution backplane



**The 9493-PS-XXX Power Supply is a general purpose Intrinsically Safe power supply unit.** It takes a 24V DC safe area or Zone 2 supply and produces an Intrinsically Safe output available in a range of different DC voltages. The 9493-PS-XXX may be mounted in a safe area or Zone 2 hazardous area.

**In order to provide multiple outputs as required, the 9493-PS-XXX power supply module is ganged up to the required number of ways,** either DIN-rail mounted or using the power distribution backplane to simplify the 24VDC input connection to the modules.

**The 9493-PS-XXX power supply module has LED power indication** for both input and output along with internal current limiting and electronic auto-reset circuit breaker action to protect the module in the event of its output being short-circuited or overloaded.

This also minimizes the power dissipation during the fault to a negligible level, thus improving reliability.

**The output is Ex ia certified for Group I, IIA, IIB or IIC,** depending on model to suit different applications.

# 9493-PS-XXX

## Intrinsically safe power supply

January 2022

### SPECIFICATION

See also System Specification

#### 9493-PS-B5

##### Power input

##### Input Voltage

24V DC (20-30V)

##### Input Current @ 24V

83mA

##### Power output

##### [Ex ia IIB] Output (pins 1 & 3)

Nominal Output Voltage

4.8V ... 5.2V


Nominal Output Current

250mA (Max 550mA)

##### U<sub>o</sub>

5.4V

Graph shows normal working range & total available range

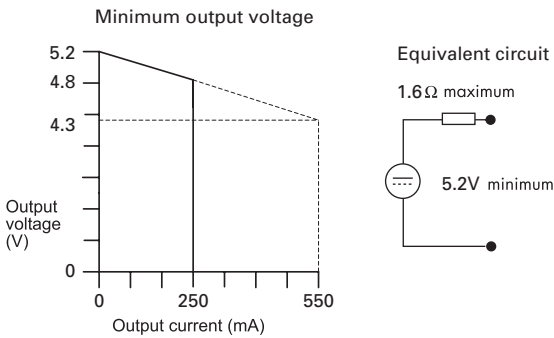

#### 9493-PS-C6

##### Power input

##### Input Voltage

24V DC (20-30V)

##### Input Current @ 24V

122mA

##### Power output

##### [Ex ia IIC] Output (pins 1 & 3)

Nominal Output Voltage

5.7V ... 6.7V


Nominal Output Current

300mA (Max 550mA)

##### U<sub>o</sub>

7V

Graph shows normal working range & total available range

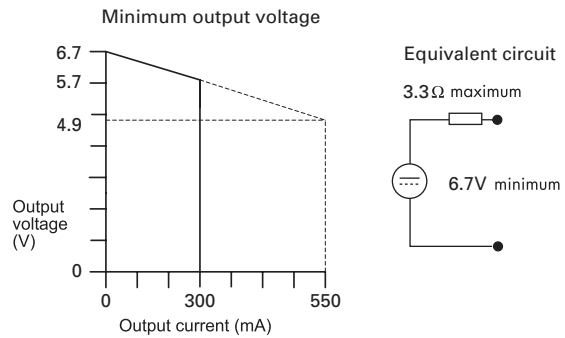

#### 9493-PS-C5

##### Power input

##### Input Voltage

24V DC (20-30V)

##### Input Current @ 24V

61mA

##### Power output

##### [Ex ia IIC] Output (pins 1 & 3)

Nominal Output Voltage

4.8V ... 5.2V


Nominal Output Current

180mA (Max 550mA)

##### U<sub>o</sub>

5.4V

Graph shows normal working range & total available range

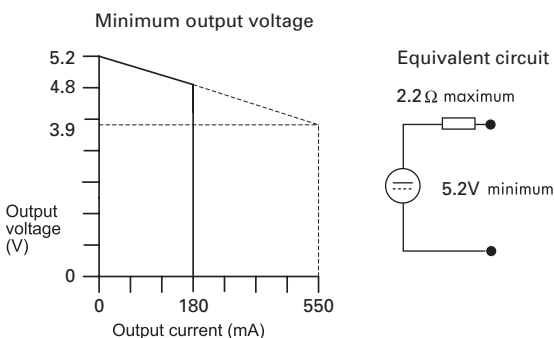

#### 9493-PS-C9

##### Power input

##### Input Voltage

24V DC (20-30V)

##### Input Current @ 24V

165mA

##### Power output

##### [Ex ia IIC] Output (pins 1 & 3)

Nominal Output Voltage

8.4V ... 9.7V


Nominal Output Current

300mA (Max 550mA)

##### U<sub>o</sub>

10V

Graph shows normal working range & total available range

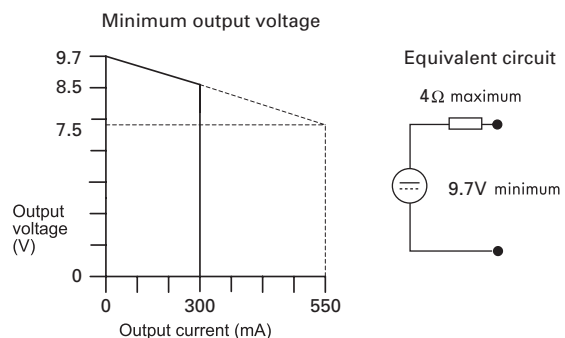

9493-PS-XXX  
Intrinsically safe power supply

January 2022

**SPECIFICATION (continued)**

See also System Specification

**9493-PS-C11**

**Power input**

**Input Voltage**

24V DC (20-30V)

**Input Current @ 24V**

196mA

**Power output**

**[Ex ia IIC] Output (pins 1 & 3)**

Nominal Output Voltage

9.9V ... 11.7V


Nominal Output Current

300mA (Max 550mA)

**U<sub>o</sub>**

12V

Graph shows normal working range & total available range

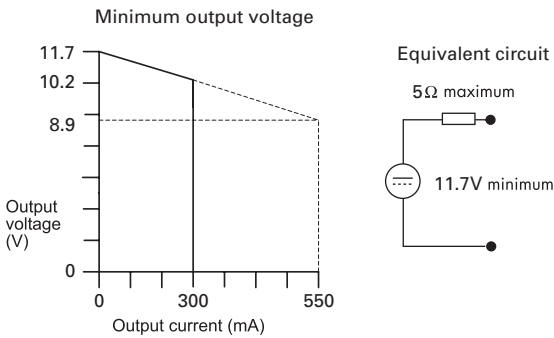

**9493-PS-B14**

**Power input**

**Input Voltage**

24V DC (20-30V)

**Input Current @ 24V**

201mA

**Power output**

**[Ex ia IIB] Output (pins 1 & 3)**

Nominal Output Voltage

12.4V ... 14.7V


Nominal Output Current

250mA (Max 260mA)

**U<sub>o</sub>**

15V

Graph shows normal working range & total available range

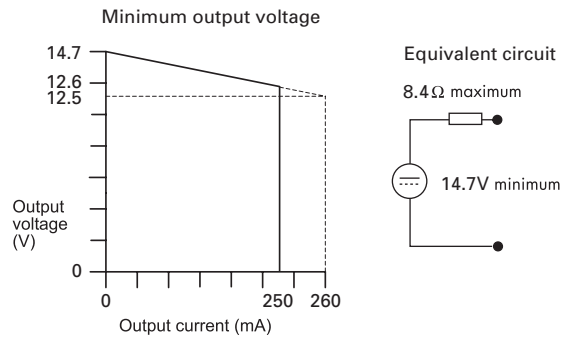

**9493-PS-C12**

**Power input**

**Input Voltage**

24V DC (20-30V)

**Input Current @ 24V**

175mA

**Power output**

**[Ex ia IIC] Output (pins 1 & 3)**

Nominal Output Voltage

10.8V ... 12.7V


Nominal Output Current

250mA (Max 260mA)

**U<sub>o</sub>**

13V

Graph shows normal working range & total available range

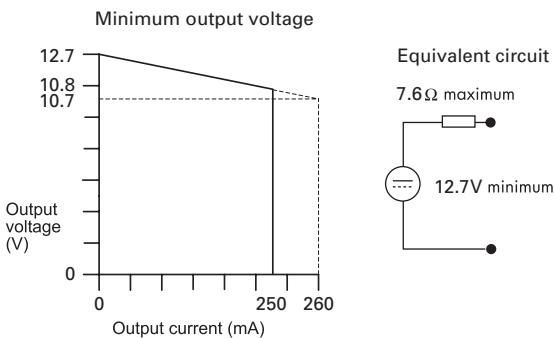

**9493-PS-C14**

**Power input**

**Input Voltage**

24V DC (20-30V)

**Input Current @ 24V**

104mA

**Power output**

**[Ex ia IIC] Output (pins 1 & 3)**

Nominal Output Voltage

12.4V ... 14.7V


Nominal Output Current

120mA (Max 260mA)

**U<sub>o</sub>**

15V

Graph shows normal working range & total available range

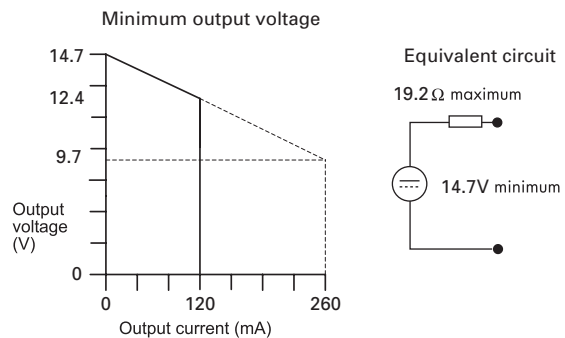

9493-PS-XXX  
Intrinsically safe power supply

January 2022

**SPECIFICATION (continued)**

See also System Specification

**9493-PS-B17**

**Power input**

**Input Voltage**

24V DC (20-30V)

**Input Current @ 24V**

163mA

**Power output**

**[Ex ia IIB] Output (pins 1 & 3)**

Nominal Output Voltage

15.0V ... 17.7V


Nominal Output Current

160mA (Max 260mA)

**U<sub>o</sub>**

18V

Graph shows normal working range & total available range

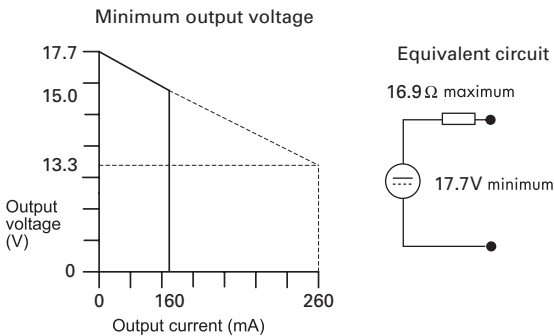

**Standard stock range**

P/N	Gas Group	U <sub>o</sub>	Nominal output voltage	Nominal output current
9493-PS-C5	IIC	5.4V	4.8V ... 5.2V	180mA
9493-PS-B5	IIB	5.4V	4.8V ... 5.2V	250mA
9493-PS-C6	IIC	7V	5.7V ... 6.7V	300mA
9493-PS-C9	IIC	10V	8.4V ... 9.7V	300mA
9493-PS-C11	IIC	12V	9.9V ... 11.7V	300mA
9493-PS-C12	IIC	13V	10.8V ... 12.7V	250mA
9493-PS-C14	IIC	15V	12.4V ... 14.7V	120mA
9493-PS-B14	IIB	15V	12.4V ... 14.7V	250mA
9493-PS-C17	IIC	18V	15.0V ... 17.7V	60mA
9493-PS-B17	IIB	18V	15.0V ... 17.7V	160mA

**NOTE:** More variants outside the Standard Stock Range can be ordered, subject to an MOQ. Please contact MTL product line for further details.

**9493-PS-C17**

**Power input**

**Input Voltage**

24V DC (20-30V)

**Input Current @ 24V**

74mA

**Power output**

**[Ex ia IIC] Output (pins 1 & 3)**

Nominal Output Voltage

15.0V ... 17.7V


Nominal Output Current

60mA (Max 160mA)

**U<sub>o</sub>**

18V

Graph shows normal working range & total available range

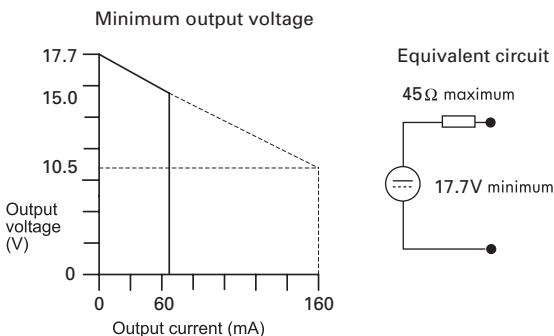

**SPECIFICATION (continued)**

**Connectors**

9493-PS-XXX is supplied with one IS output connectors.  
 Capacity 2.5mm<sup>2</sup> stranded or single core  
 (When using crimp ferrules for the IS connectors the metal tube length should be 12mm and the wire trim length 14mm.)

**ISOLATION**

Isolation - input to output  
 Um = 253V rms

**SAFETY**

**Location of module**

Safe area, Zone 2

**Location of field wiring**

**[Ex ia] output**  
 Zone 0, (Gas group depends on model type)  
 Model 9493-PS-CXX, IIC Hazardous area  
 Model 9493-PS-BXX, IIB Hazardous area  
 Model 9493-PS-AXX, IIA Hazardous area  
 Model 9493-PS-MXX, Group 1 Mining

**Certification Code**

See approvals

**Safety description**

See certificates  
 CML 15ATEX2071X,  
 CML ATEX 4072X,  
 IECEx CML 15.0034X ,  
 IECEx TRA 17.0003X  
 CML 21UKEX21069X,  
 CML 21UKEX41070X

**DIMENSIONS (mm)**

**MECHANICAL**


**Mounting**

DIN rail

Please contact Eaton MTL product line for 'backplane' option

**Dimensions**

See diagram

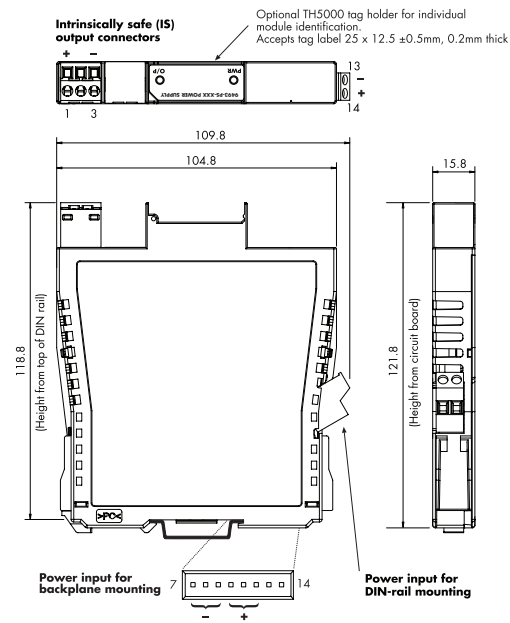

**Weight**

130 g

**ENVIRONMENTAL**

**Ambient temp**

Operating -40°C to +70°C  
 Storage -40°C to +70°C

**Relative Humidity**

5 to 95% RH (non-condensing)

**Ingress Protection**

Select enclosure to suit application, see certificate for information

**LED INDICATORS**

	OFF	Flash	ON
<b>Pwr (green)</b>	24V power fail	N/A	24V power OK
<b>IS (green)</b>	IS power fail	output overload or short circuit present	IS power OK



**Eaton Electric Limited,**  
 Great Marlings, Butterfield, Luton  
 Beds, LU2 8DL, UK.  
 Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283  
 E-mail: mtlenquiry@eaton.com  
 www.mtl-inst.com

© 2022 Eaton  
 All Rights Reserved  
 Publication No. EPS 9493-PS-XXX Rev 3 100121  
 January 2022

**EUROPE (EMEA):**  
 +44 (0)1582 723633  
 mtlenquiry@eaton.com

**THE AMERICAS:**  
 +1 800 835 7075  
 mtl-us-info@eaton.com

**ASIA-PACIFIC:**  
 +65 6 645 9888  
 sales.mtlsing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.