

# MTL4531 – MTL5531 VIBRATION TRANSDUCER INTERFACE

The MTLx531 repeats a signal from a vibration sensor in a hazardous area, providing an output for a monitoring system in the safe area. The interface is compatible with 3-wire eddy-current probes and accelerometers or 2-wire current sensors; the selection is made by a switch on the side of the module.

## SPECIFICATION

See also common specification

### Number of channels

One

### Sensor type

2- or 3-wire vibration transducer


### Location of signal source

Zone 0, IIC, T4–6 hazardous area if suitably certified  
Div. 1, Group A hazardous location

### Hazardous-area input

Input impedance  
(terminals 2 & 3): 10k $\Omega$

### Transducer supply voltage, 3-wire (terminals 3 & 1)

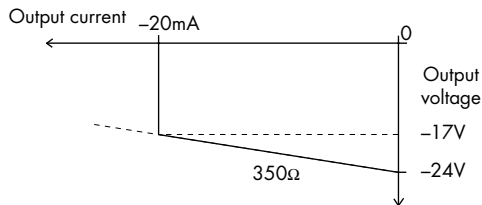

### Transducer supply current, 2-wire

3.3mA (nom.) for 2-wire sensors, user selectable by switch

### Signal range

Minimum -20V, maximum -0.5V

### DC transfer accuracy at 20°C

< $\pm$ 50mV

### AC transfer accuracy at 20°C

0Hz to 1kHz:  $\pm$ 1%  
1kHz to 10kHz: -5% to +1%  
10kHz to 20kHz: -10% to +1%

### Temperature coefficient

$\pm$ 50ppm/ $^{\circ}$ C (10 to 65 $^{\circ}$ C)  
 $\pm$ 100ppm/ $^{\circ}$ C (-20 to 10 $^{\circ}$ C)

### Voltage bandwidth

-3dB at 47kHz (typical)

### Phase response

<14 $\mu$ s, equivalent to:  
-1 $^{\circ}$  at 200Hz  
-3 $^{\circ}$  at 600Hz  
-5 $^{\circ}$  at 1kHz  
-50 $^{\circ}$  at 10kHz  
-100 $^{\circ}$  at 20kHz

### Safe-area output impedance


<20 $\Omega$

### LED indicator


Green: power indication



## MTL4531

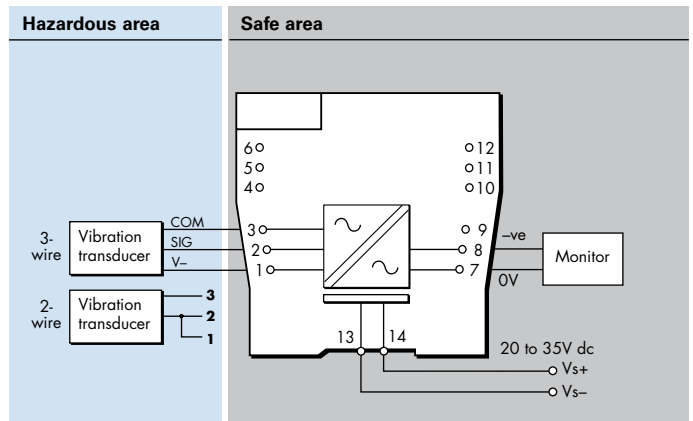

## MTL5531

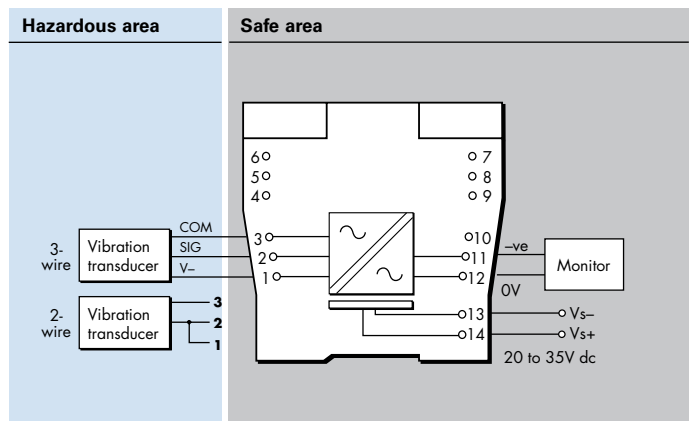

### Supply voltage

20 to 35V dc

### Maximum current consumption (10mA transducer load)

96mA at 24V

### Maximum power dissipation within unit

2W

### Safety description

Terminals 3 to 1

$U_o=26.6V$   $I_o=94mA$   $P_o=0.66W$   $U_m = 253V$  rms or dc

Terminals 3 to 2

Non-energy-storing apparatus  $\leq 1.5V$ ,  $\leq 0.1A$  and  $\leq 25mW$



### SIL capable

These models have been assessed for use in IEC 61508 functional safety applications up to SIL 1.

See data on MTL web site and refer to the safety manual.