

## ZoneMaster Pro range

Designed for all types of switchgear, distribution & branch panels, plus available with numerous options for a broad range of applications.

- **Enhanced redundancy built into each module**
- **Thermal and short circuit fusing**
- **Surge counter with fault monitor and audible alarm**
- **Low let-through performance with high current impulses**
- **100k AIC short circuit rating**
- **Replaceable bolt-in modules**
- **UL 1449 3rd Edition Listed**
- **15 year product warranty**



**ZoneMaster PRO range** of surge protection devices combines all the advantages of all mode protection with features and options to meet the needs of the most complex protection requirements. The ZoneMaster PRO range is available with surge current capacities of 200kA, 240kA, 340kA and 400kA. This along with the different international voltages available make the ZoneMaster PRO the most versatile product on the market.

**ZoneMaster PRO range features** modular construction, individual modules are bolted to a large surge return plate to minimize transient impedance. These color coded replaceable modules with a UL94-5V rated plastic casing are supplied mounted within a durable metal enclosure. The ZoneMaster PRO units are easy to install via simple surface mounting or optional flush mounting.

**Large block Metal Oxide Varistor (MOV)** protection technology is utilized within all the ZoneMaster PRO range. Each of the large block MOVs are individually fused for both thermal and short circuit protection. This provides redundancy ensuring the facility is never unprotected.

**Status indication is provided** through a front panel display, audible, and NO/NC remote alarm contacts. Individual module status is provided by LED status indication on each module. An optional remote monitoring unit is also available providing audible and visual indication of protection status, along with features such as a test switch for checking the monitoring circuitry and an audio alarm silence switch.

**The optional power filter** has a noise attenuation of 75dB at 100kHz - 100MHz and will attenuate 6kV transients down to just 200 volts. This power filter is UL1283 Listed and all ZoneMaster PRO devices are UL1449 3rd Edition Listed.

# ZoneMaster Pro range

September 2016

## SPECIFICATION

All figures typical at 77°F (25°C) unless otherwise stated

### Maximum continuous operating voltage

120V — 140Vac  
240V — 280Vac  
277V — 320Vac

### Lines protected

ZoneMaster PRO 200  
L-N 100kA, L-G 100kA, L-L 200kA, N-G 200kA  
*Delta* — L-G 200kA, L-L 200kA  
ZoneMaster PRO 240  
L-N 120kA, L-G 120kA, L-L 240kA, N-G 240kA  
*Delta* — L-G 240kA, L-L 240kA  
ZoneMaster PRO 340  
L-N 170kA, L-G 170kA, L-L 340kA, N-G 170kA  
*Delta* — L-G 340kA, L-L 340kA  
ZoneMaster PRO 400  
L-N 200kA, L-G 200kA, L-L 400kA, N-G 200kA  
*Delta* — L-G 400kA, L-L 400kA

### Duty cycle performance (8/20 $\mu$ s)

100,000A >4 impulses  
10,000A >8,000 impulses  
200A infinite

### Impulse current for class I (I<sub>imp</sub>)

50kA (10/350 $\mu$ s)

### Long duration current pulse (10/1,000 $\mu$ s) capability

3,600A (tested)

### Ambient temperature limits

-40°F to +185°F (working)  
-40°C to +85°C (working)

### Humidity

95% RH (non-condensing)

### Enclosure

NEMA 1 (standard)

### Terminals

2 AWG (32mm<sup>2</sup>)

### Mounting

Surface mount via 0.31" (8mm) diameter holes or optional flush mount available

### Indication

Continuous visual status monitoring  
Green LED Lit = Full protection  
Red LED Lit = Reduced (Standby)  
OR No protection

### Remote contacts

NO/NC

### Weight

25.4 lbs (11.2kg)

### Dimensions

Enclosure — see figure 1  
NEMA 4X: 507 x 508 x 255mm (approx.)

### EMC compliance

BS EN 60950: 1992  
BS EN 61000-6-2: 1999

## OPTIONAL POWER FILTER

### Limiting voltage

200V (@3kA 8.20 $\mu$ s)

### Maximum attenuation (typical)

-75dB (100kHz to 100MHz)

## ORDERING INFORMATION

### Model number as per specification table

Add suffix X for EMI/RFI filter  
Add suffix F for flush mount options  
Add suffix D for disconnect  
Add suffix O for NEMA 4 enclosure  
Add suffix S for NEMA 4X enclosure  
Add suffix R for battery powered remote monitor unit



Powering Business Worldwide

Model	Maximum surge current I <sub>max</sub> (kA)	Working voltage (V)	UL 3rd Edition VPR (V)	Limiting voltage @3kA* @10kA (In) (V)		Phase types
				(V)	(V)	
ZM15100	200	120/240 split	700	416	528	Split phase 3 wire
ZM15101	200	120/208	700	416	528	Three phase 4 wire WYE
ZM15102	200	120/240	700/1200	416	528	Three phase 4 wire Delta
ZM15103	200	240	1200	832	1056	Three phase 3 wire Delta
ZM15104	200	277/480	1200	776	904	Three phase 4 wire WYE
ZM15106	200	480	2000	1552	1800	Three phase 3 wire Delta
ZM15107	200	220/380	1200	776	904	Three phase 4 wire WYE
ZM15108	200	240/415	1200	776	904	Three phase 4 wire WYE
ZM15000	240	120/240 split	700	416	528	Split phase 3 wire
ZM15001	240	120/208	700	416	528	Three phase 4 wire WYE
ZM15002	240	120/240	700/1200	416	528	Three phase 4 wire Delta
ZM15003	240	240	1200	832	1056	Three phase 3 wire Delta
ZM15004	240	277/480	1200	776	904	Three phase 4 wire WYE
ZM15006	240	480	2000	1552	1800	Three phase 3 wire Delta
ZM15007	240	220/380	1200	776	904	Three phase 4 wire WYE
ZM15008	240	240/415	1200	776	904	Three phase 4 wire WYE
ZM15200	340	120/240 split	700	416	528	Split phase 3 wire
ZM15201	340	120/208	700	416	528	Three phase 4 wire WYE
ZM15202	340	120/240	700/1200	416	528	Three phase 4 wire Delta
ZM15203	340	240	1200	832	1056	Three phase 3 wire Delta
ZM15204	340	277/480	1200	776	904	Three phase 4 wire WYE
ZM15206	340	480	2000	1552	1800	Three phase 3 wire Delta
ZM15207	340	220/380	1200	776	904	Three phase 4 wire WYE
ZM15208	340	240/415	1200	776	904	Three phase 4 wire WYE
ZM15300	400	120/240 split	700	416	528	Split phase 3 wire
ZM15301	400	120/208	700	416	528	Three phase 4 wire WYE
ZM15302	400	120/240	700/1200	416	528	Three phase 4 wire Delta
ZM15303	400	240	1200	832	1056	Three phase 3 wire Delta
ZM15304	400	277/480	1200	776	904	Three phase 4 wire WYE
ZM15306	400	480	2000	1552	1800	Three phase 3 wire Delta
ZM15307	400	220/380	1200	776	904	Three phase 4 wire WYE
ZM15308	400	240/415	1200	776	904	Three phase 4 wire WYE

\*Tested as per ANSI/IEEE C62.45; IEC 61643-1 U<sub>oc</sub> = 6kV

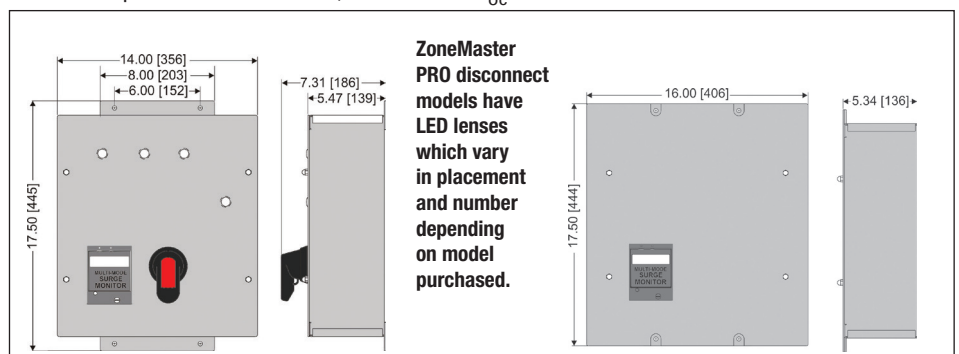


Figure 1 Dimensions

Flush mount (without disconnect)

## APPROVALS

Country	Standard/Authority	Approved for	Product
United States	UL 1449 3rd Edition Listed	AC power product	ZoneMaster PRO
Canada	(C-UL-US Listed)		

### Eaton Electric Limited.

Great Marlings, Butterfield, Luton  
Beds, LU2 8DL, UK.  
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283  
E-mail: mtlenquiry@eaton.com  
www.mtl-inst.com

© 2016 Eaton  
All Rights Reserved  
Publication No.  
EPS 901-160 rev F 220916

### EUROPE (EMEA):

+44 (0)1582 723633 mtlenquiry@eaton.com

### THE AMERICAS:

+1 800 835 7075 mtl-us-info@eaton.com

### ASIA-PACIFIC:

+65 6 645 9888 sales.mtling@eaton.com