

MTL4644A/AS CURRENT REPEATER

4/20mA passive i/p for HART® transmitters

The MTL4644A provides an input for separately powered 4/20mA transmitters and also allows bi-directional transmission of HART communication signals superimposed on the 4/20mA loop current, so that the transmitter can be interrogated either from the operator station or by a hand-held communicator (HHC). Alternatively, the MTL4644AS acts as a current sink rather than driving a current into the load.

SPECIFICATION

See also common specification

Number of channels

Two

Input

Signal range: 4 to 20mA
Under/over-range: 1.0 to 21.5mA

Input impedance for HART signals

at terminals 1, 2 and 4, 5: > 230Ω

Maximum input volt drop

at terminals 1, 2 and 4, 5: < 6.6V
i.e. a transmitter load of 330Ω at 20mA

Output

Signal range: 4 to 20mA
Under/over-range: 1.0 to 21.5mA
Load resistance (MTL4644A)
Conventional transmitters: 0 to 360Ω
Smart transmitters: 250Ω ±10%
Load (MTL4644AS)
Current sink: 600Ω max.
Maximum voltage source: 24V DC
Circuit output resistance: > 1MΩ

Circuit ripple

< 50μA peak-to-peak up to 80kHz

Transfer accuracy at 20°C

Better than 20μA

Temperature drift

< 1μA/°C


Response time

Settles within 200μA of final value after 20ms

Communications supported

HART

MTL4644A / MTL4644AS

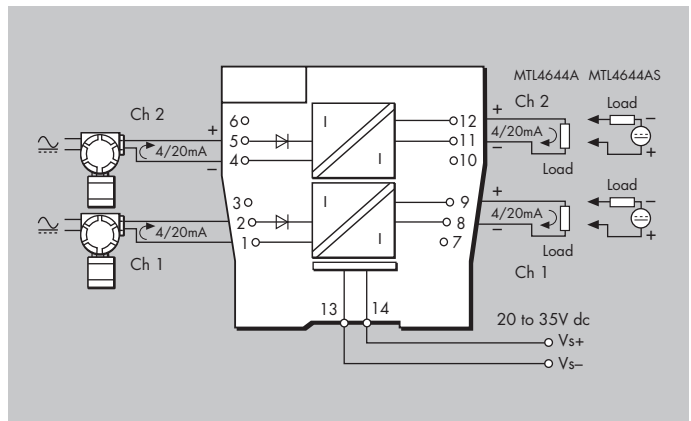

LED indicator

Green: power indication

Power requirement (with 20mA signal)

70mA at 24V
85mA at 20V
50mA at 35V

Power dissipation within unit (with 20mA signals)

MTL4644A 1.5W @ 24V dc
MTL4644AS 2.0W @ 24V dc

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



Powering Business Worldwide

Eaton Electric Limited,

Great Marlings, Butterfield, Luton
Beds, LU2 8DL, UK.
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
E-mail: mtlenquiry@eaton.com
www.mtl-inst.com

© 2016 Eaton
All Rights Reserved
Publication No.
EPS4644A/AS Rev 3 010916

EUROPE (EMEA):

+44 (0)1582 723633 mtlenquiry@eaton.com

THE AMERICAS:

+1 800 835 7075 mtl-us-info@eaton.com

ASIA-PACIFIC:

+65 6 645 9888 sales.mtlsing@eaton.com