

## MTL LS range

### Surge and transient protection for LED lighting systems

- Protects LED lighting systems and drivers
- Space-saving footprint for mounting in confined locations
- Protects 120V-347V and 480V systems
- High performance to size ratio
- Fully automatic operation
- Models for both series and parallel connection
- UL1449 3rd edition type 4CA recognized component
- IP66 protection allows for installation in extreme environments
- Unique hybrid technology
- No external fusing required
- 10 year product warranty



The LS range of surge protection devices are versatile high performance surge protection devices which can be used within a wide variety of equipment in industrial and commercial applications. The circuitry will protect equipment from damaging electrical transients and disturbances.

The space-saving footprint allows the LS range to be mounted in confined locations whilst providing protection the Line/Neutral, Line/Ground, and Neutral/Ground modes.

We provide a high performance-to-size ratio by utilizing a hybrid of Metal Oxide Varistor (MOV) alongside high energy gas discharge tube (GDT) technologies, together with a state-of-the-art failure disconnect network giving added peace of mind.

Fully automatic in operation, the LS range reacts immediately, clamping voltage surges without causing undue leakage losses under normal operation. No operator intervention is required, the LS range resets automatically and are maintenance-free.

The LS range has in-built overcurrent protection and therefore no additional external fusing is required. The two voltage models can handle operating voltages up to 480v, which reduces your inventory and cost.

High maximum operating voltage ranges allows the LS range to endure large over-voltage swings that damage most other SPDs. Low limiting voltage even at high surge current levels, provides optimal protection and ensures longevity of the LED drivers.

Only an ohmmeter is needed to test operational condition of our LS range. No additional test equipment is required.

Parallel and Series versions are available. The LS10N-xxxx-S2 models are series-connected devices which automatically disconnect power to the load under fault conditions. The LS12N-xxxx-P2 are parallel connected devices which disconnect themselves from the load under fault conditions leaving power to the load.

Meeting and exceeding the requirements of ANSI/IEEE C62.45 and ANSI/IEEE C62.41 the LS range is also a UL1449 3rd edition type 4 recognized component. With ingress protection to IP66 (NEMA 4X), the LS range can be installed in most locations and carries an unrivalled "no fuss" 10 year manufacturer's warranty.

# MTL LS range

September 2016

## SPECIFICATION

### Maximum surge current

Series connected units: 10kA (8/20µs)  
 Parallel connected units: 12kA (8/20µs)

### Leakage current

<0.3mA

### Maximum continuous operating current

5A series connected units  
 Unlimited Amps parallel connected units

### Working voltage

LS10N-347V-S2 120-347VAC, 47-63Hz  
 LS10N-480V-S2 480VAC, 47-63Hz  
 LS12N-347V-P2 120-347VAC, 47-63Hz  
 LS12N-480V-P2 480VAC, 47-63Hz

### Ambient temperature limits

-40°C to +85°C (operating)  
 -104°F to +185°F (operating)  
 -40°C to +110°C (storage)  
 -104°F to +230°F (storage)

### Casing

High Temperature ABS/PC UL94-5V

### Weight

284 grams (10 oz.)

### Dimensions

See Figures 1 & 2

### Ingress protection

IP66 (NEMA 4X)

### Approvals

UL1449 SPD Recognized Component  
 Type 4 Component Assembly

### Standards

- ANSI/IEEE C62.41: 2002 Location C, High Exposure
- ANSI C136.2 10kV BIL
- Meets Surge Protection Requirements of : US Air Force ETL 10-2 LED Fixture Design & Installation Criteria
- Commercial Building Energy Alliances (CBEA) LED Lighting Performance Specifications

## ORDERING INFORMATION

Model	Circuit Type	Service	Modes	Maximum Surge Current	Maximum Continuous Operating Voltage	U <sub>p</sub> @ 3kA (8/20µs)	U <sub>p</sub> @ 10kA (8/20µs)
LS10N-347V-S2	Series Hybrid	120-347V, 5A	L-N,L-G,N-G	10kA	420Vac	920V	1140V
LS10N-480V-S2	Series Hybrid	480V, 5A	L-L, L-G	10kA	510Vac	920V	1140V
LS12N-347V-P2	Parallel Hybrid	120-347V	L-N,L-G,N-G	12kA	420Vac	920V	1140V
LS12N-480V-P2	Parallel Hybrid	480V	L-L, L-G	12kA	510Vac	920V	1140V

## DIMENSIONS

Measured in inches [mm]

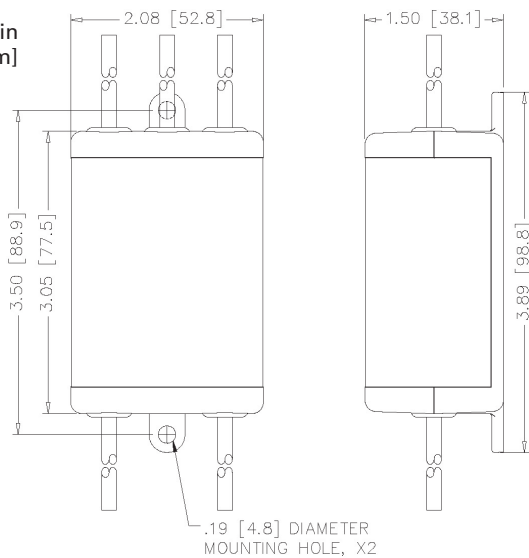


Figure 1: - LS10N models

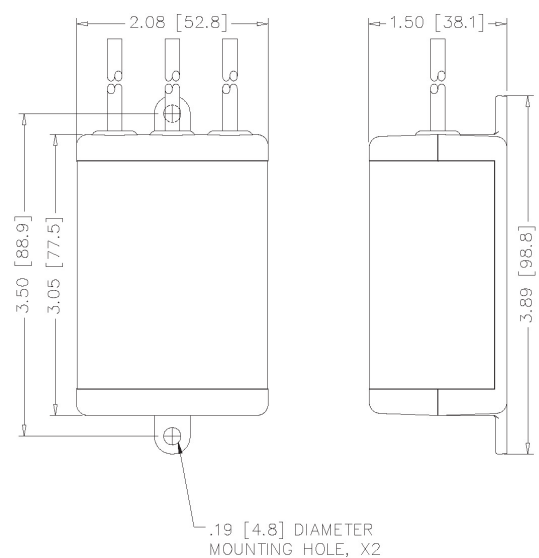


Figure 2: - LS12N models



**Eaton Electric Limited,**  
 Great Marlings, Butterfield, Luton  
 Beds, LU2 8DL, UK.  
 Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283  
 E-mail: [mtlenquiry@eaton.com](mailto:mtlenquiry@eaton.com)  
[www.mtl-inst.com](http://www.mtl-inst.com)

© 2016 Eaton  
 All Rights Reserved  
 Publication No. EPS 901-186 LS-2 Rev B 010916  
 September 2016

**EUROPE (EMEA):**  
 +44 (0)1582 723633  
[mtlenquiry@eaton.com](mailto:mtlenquiry@eaton.com)

**THE AMERICAS:**  
 +1 800 835 7075  
[mtl-us-info@eaton.com](mailto:mtl-us-info@eaton.com)

**ASIA-PACIFIC:**  
 +65 6 645 9888  
[sales.mtlsing@eaton.com](mailto:sales.mtlsing@eaton.com)

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.